
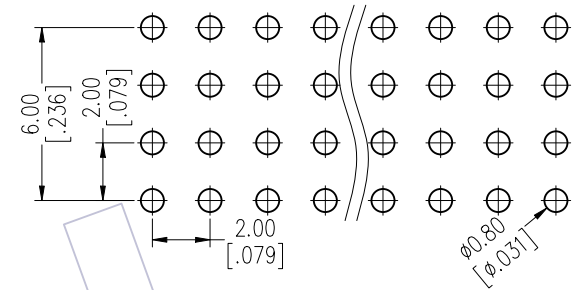


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) $\Delta\Delta$

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)


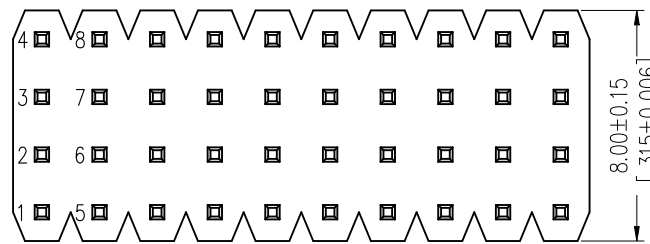


Ordering Information

1215-24 XX XX S XXX C 0 XX $\Delta\Delta$

$\Delta\Delta$

No. of Pins Per Row: 04-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+C Standard:	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01~99
-------------------------------	---	------------------------------------	------------------------------	-------------------------------	---------------------

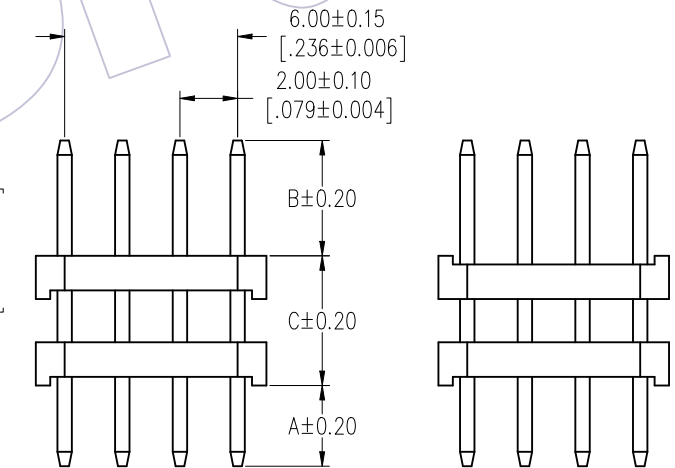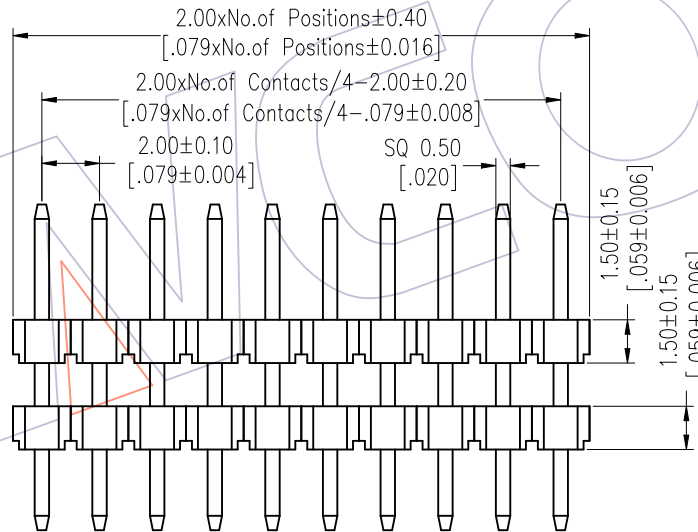

TYPE 1

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	---	2.80	4.00	---	2263
	17.00	3.00	3.00	11.00	
	28.00	2.30	4.00	21.70	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 04~40P	$\Delta\Delta$	Du Ying	OPERATION	2020/06/12	UNIT	mm	1215-24XXXXXXC0XX $\Delta\Delta$
A2	2019/03/04	Modify	$\Delta\Delta$	Ding	CHECK	DATE	SIZE	A4	TITLE: PH2.00 FOUR ROW DOUBLE PLASTIC 180° H=1.5
A1	2018/01/18	Modify P/N	$\Delta\Delta$	---	CHECK	DATE	SHEET	1/1	Customer NO.
A0	2012/04/18	NEW	---	---	APPROVE	DATE	PROJ.		
				Angle ± 3°					
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com