

HSF


NOTES:
 Current Rating:1AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze(C5191-H)
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%GF(UL94V-0)

Ordering Information

3135-XX S XX B K00 X 2

No. of Pins	Contact Plating	Color Insulator	Packing
△ 4 6 8	G0=Gold Flash	B=Black	T=Tube
10 34	G3=10u"Gold	U=Blue	
14 40	G4=15u"Gold	W=White	
16 44	G5=30u"Gold		
20 50	S0=Gold Flash/Tin		
24 60	S3=10u"Gold/Tin		
26 64	S4=15u"Gold/Tin		
30 80	S5=30u"Gold/Tin		
32 100	SN=Tin		

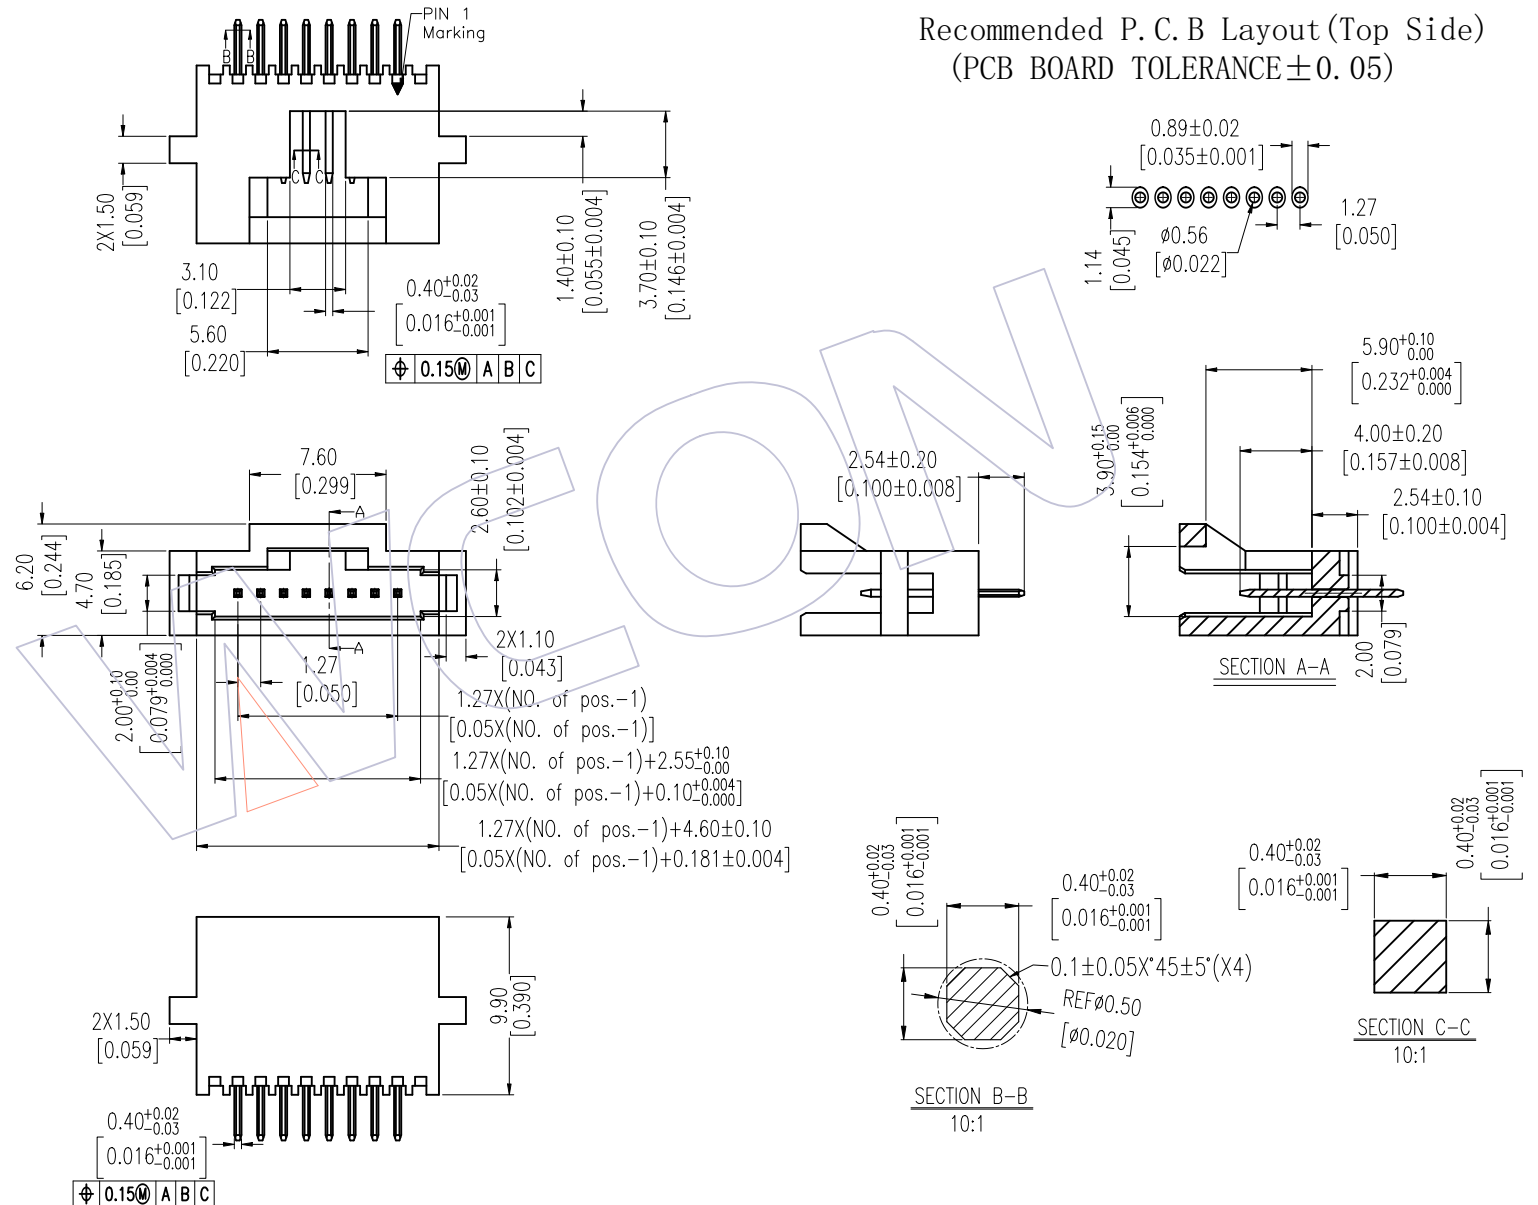

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	Allen	2015/01/20	UNIT mm		3135-XXSXXBK00X2
A1	2015/01/20	Modify	△	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.27 BOX HEADER
A0	2013/08/27	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		180° DIP SINGLE ROW
				Angle ± 3°			PROJ.	Customer NO.	
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com