HSF

NOTES:
Current Rating: 0.5AMP
Contact Resistance: 65mΩ Max
Withstand Voltage: 250V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:LCP+30%G.F UL94V-0

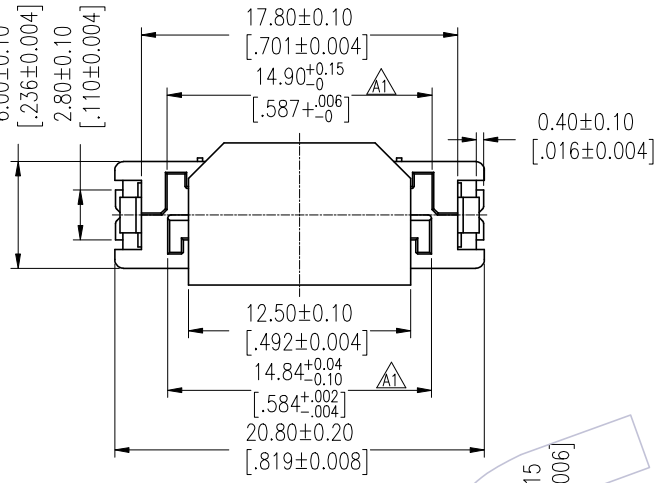

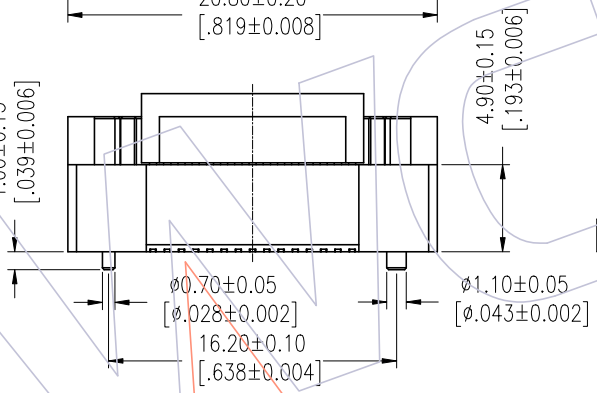

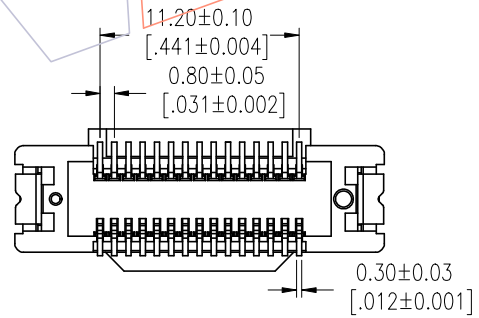

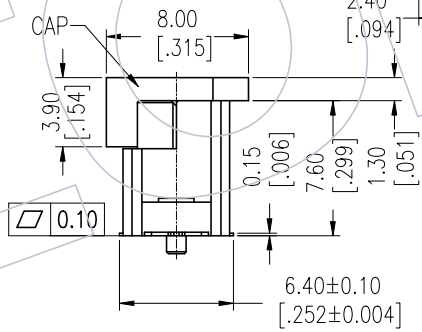

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

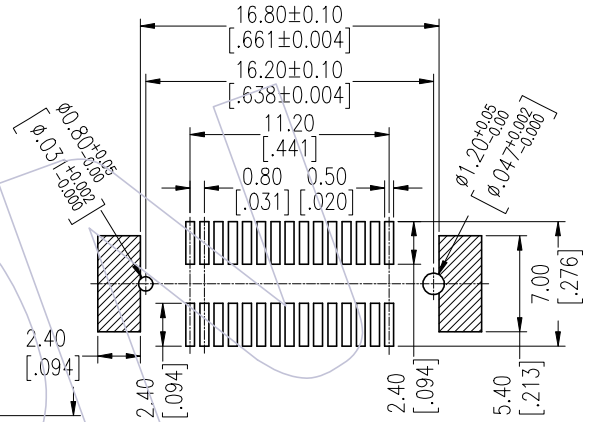



Ordering Information

3613- A 030 - 076 XX R 01

No.of Pins	Housing High	Contact Plating	Packing
		S0=Gold Flash/Tin	T=Tube
		S3=10u"Gold/Tin	P=Tube+CAP
		S4=15u"Gold/Tin	R=Tape&Reel+CAP
		S5=30u"Gold/Tin	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2017/02/28	Modify DIM	------
A0	2012/11/22	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	Surong Xu	2017/02/28
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3613-A030-076XXR01

TITLE: 0.80mm B TO B SMT 30P

Customer NO. K2058U

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com