
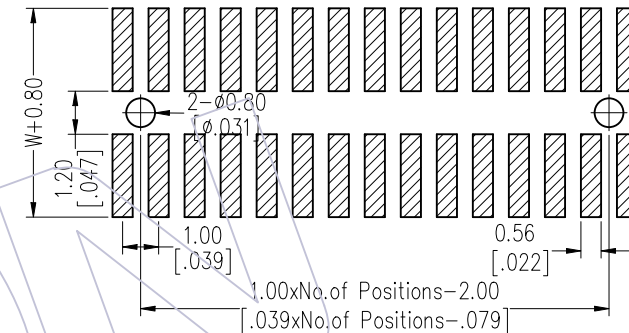


HSF

NOTES:
 Rated Current: 0.75AMP.
 Contact Resistance: 30mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

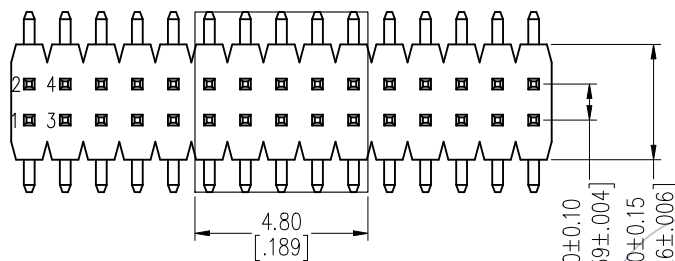

Ordering Information

1515-22 XX XX M XXX C X XX

No. of Pins Per Row: 02~50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold SN=Tin SM=Matte Tin	Pin Length L=B+C+D+W/2	Insulator C=PA9T	Series No. 01-99
			Packing T=Tube P=Tube+CAP R=Tape&Reel+CAP	

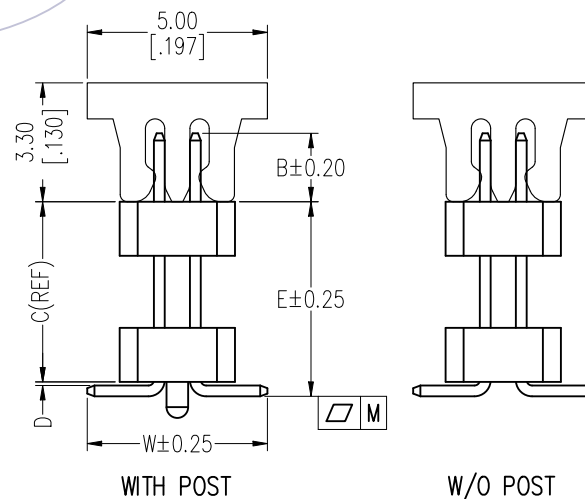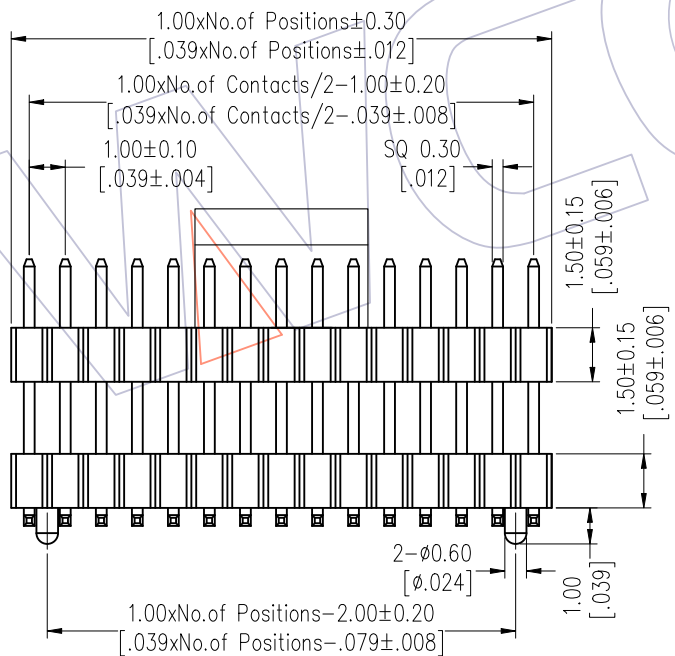

Item	Pin Length	W	D	B	E
Standard	--	5.00	0.10	1.90	--
Alternate					

PIN(PerRow)	2-15P	16-30P	31-50P
M	0.10	0.12	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2023/02/01	Add Flatness	△	OPERATION	William Chen	2018/01/05	UNIT	mm [inch]	1515-22XXXXMXXXXX
A2	2018/01/05	MODIFY PART NO.	----	x.X ±0.40	CHECK	DATE	SIZE	A4	TITLE:
A1	2012/11/20	Modify the material	----	x.XX ±0.25	APPROVE	DATE	SHEET	1/1	1.00 Pin Header, DUAL ROW, DOUBLE PLASTIC, SMT, H=1.5
A0	2012/03/01	NEW	----	x.XXX ±0.15	APPROVE	DATE	PROJ.	Customer NO.	
				Angle ± 3°					
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--