
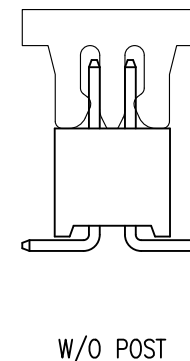
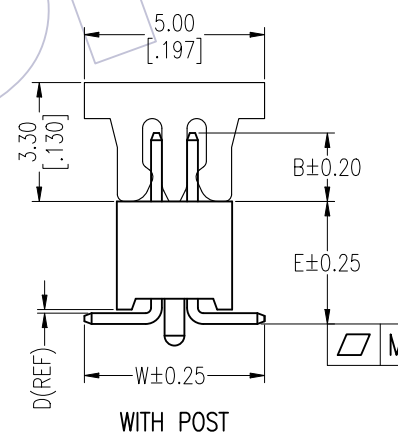
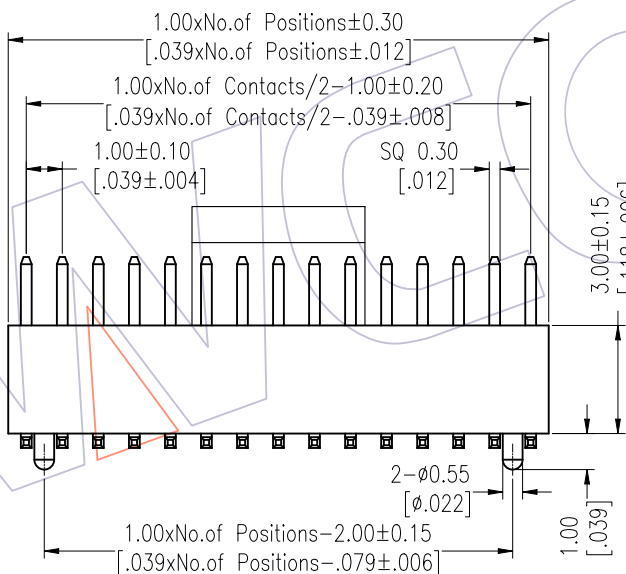
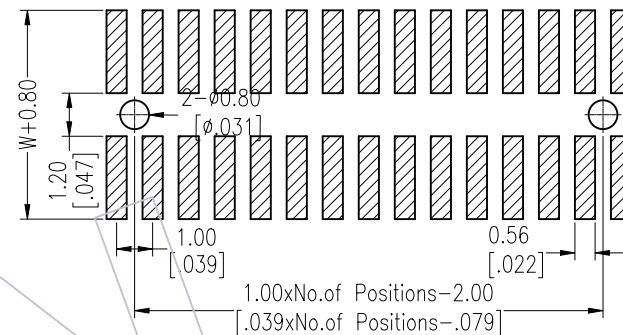


HSF

NOTES:
 Rated Current:0.75AMP.
 Contact Resistance:30mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

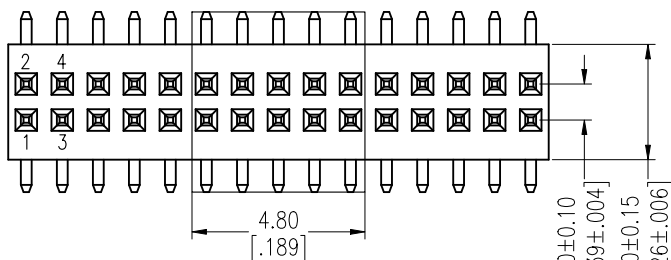

Ordering Information

1530-12 XX XX M 070 C R XX

No. of Pins Contact Plating Pin Length Insulator Series No.
 Per Row:02-50 G0=Gold Flash L=B+D+3.0+ $\frac{W+L}{2}$ C=PA9T 01~99
 G3=10u"Gold Standard:070=7.0
 G4=15u"Gold
 G5=30u"Gold
 SN=Tin
 SM=Matte Tin

Packing
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Item	Pin Length	W	E	B
Standard	7.0	5.00	3.40	1.90
Alternate				

PIN(PerRow)	2-15P	16-30P	31-50P	△
M	0.10	0.12	0.18	

A3	2023/02/01	Add Flatness	△	Du Ying	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	△	William Chen	X.X ±0.40	Du Ying	2023/02/01	UNIT	mm [inch]	1530-12XXXXMXXXCXXX △
A1	2012/11/21	Modify the material	△	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, DUAL ROW, SMT, H=3.0
A0	2012/03/01	NEW	-----	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	-----	Angle ± 3'	DIM	TOL	PROJ.	☯	

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com