



HSF

NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

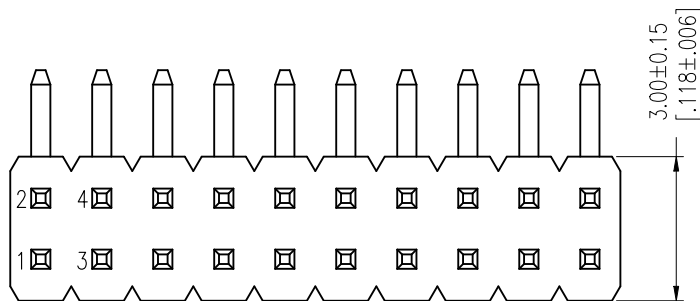



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

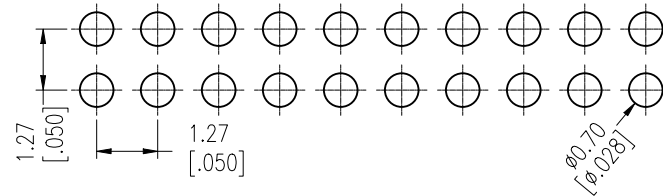

Ordering Information

1320-12 XX XX R XXX C A XX

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:01~50	G0=Gold Flash	L=A+B+D+2.8	C=PA9T	A=Tray	01~99
	G3=10u"Gold	Standard:075=7.5			
	G4=15u"Gold	086=8.6			
	G5=30u"Gold	096=9.6			
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

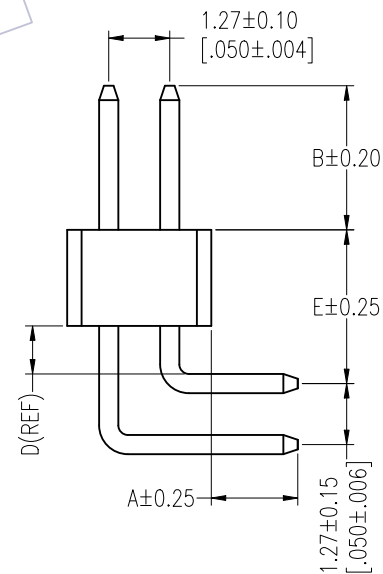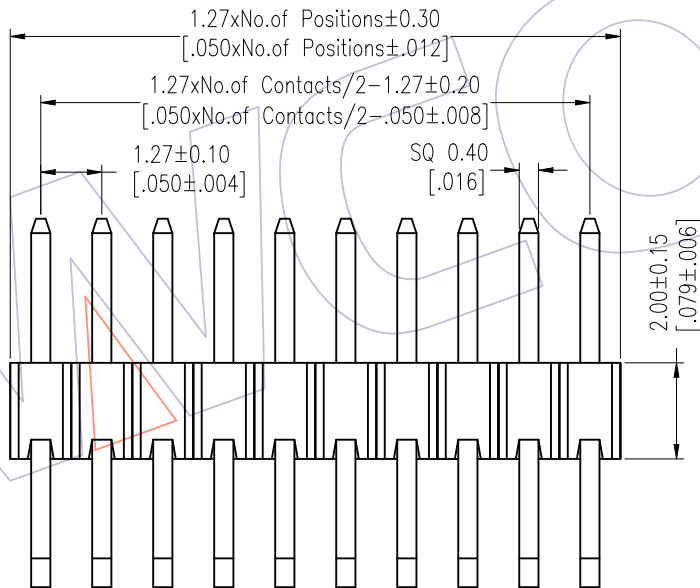

Item	Pin Length	A	E	B	Mating
Standard	7.5	1.80	3.20	1.90	2321
	8.6	1.80	3.20	3.00	2334
	9.6	1.80	3.20	4.00	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/17	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/17	UNIT	mm [inch]	1320-12XXXXRXXXCXXX
A0	2012/03/22	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, R/A, CONCAVE BENDING, H=2.0
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com