
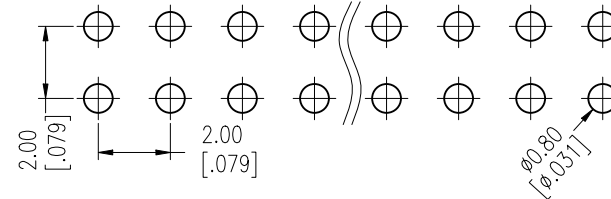


HSF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

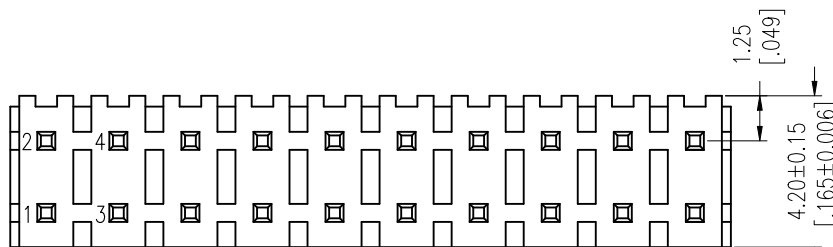

Ordering Information

1240-12 XX XX S XXX C 0 XX Δ

No.of Pins Per Row:02~40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+4.0 Standard:108=10.8	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01~99
-----------------------------	---	--	------------------------------	-------------------------------	---------------------

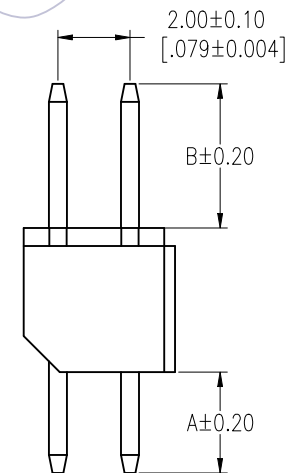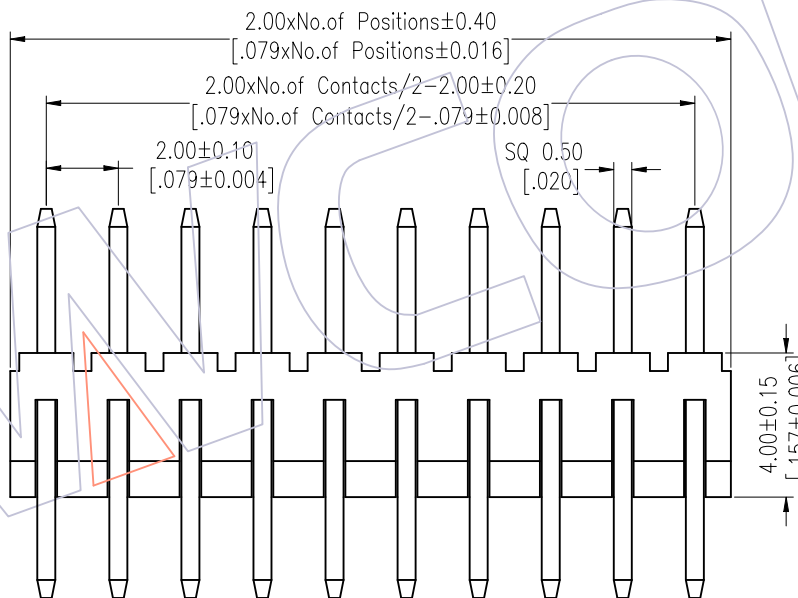

Item	Pin Length	A	B	Mating
Standard	10.80	2.80	4.00	2240 2243 2272
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	<i>Liu</i>	2018.01.19	UNIT mm		1240-12XXXXXXC0XX Δ
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 DUAL ROW 180° H=4.0
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3°			PROJ. Φ		
DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com