
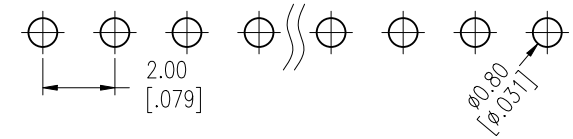


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

NOTES:  
 Rated Current: 2.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40°C to +105°C



Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0 BK

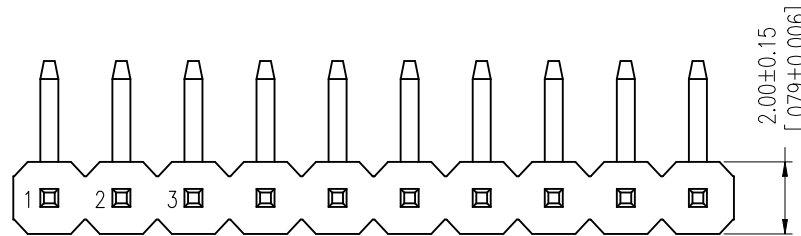

## Ordering Information

1220-11 XX XX R XXX C 0 XX

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+D+3.0 Standard: 105=10.5	C=PA9T	0=PE Bag T=Tube	01~99

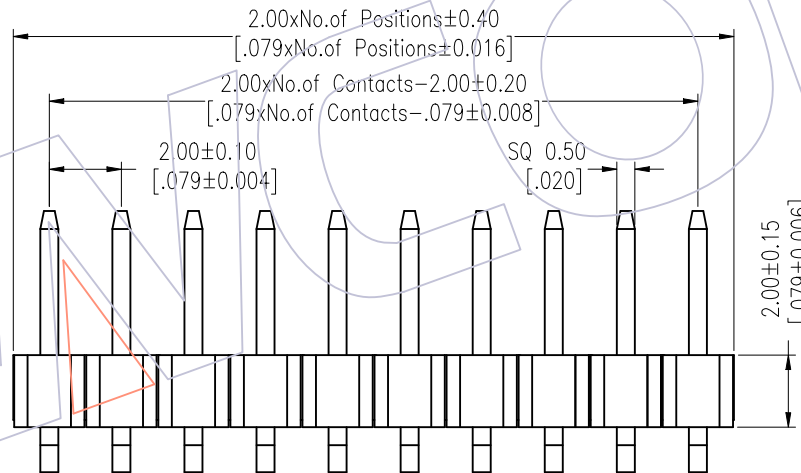

Item	Pin Length	A	E	B	Mating
Standard	10.50	2.80	3.00	4.00	2240 2243 2263 2272
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ± 0.40	<i>Liu</i>	2018.01.18	UNIT mm		1220-11XXXXRXXXCOXX
X.XX ± 0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 SINGLE ROW 90°CONCAVE BENDING H=2.0
X.XXX ± 0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/18	Modify P/N	
A0	2012/04/26	NEW	