
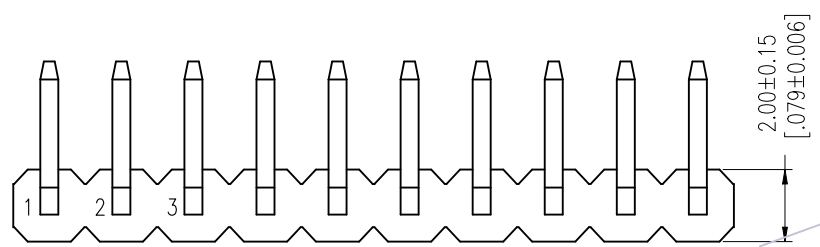


HSF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

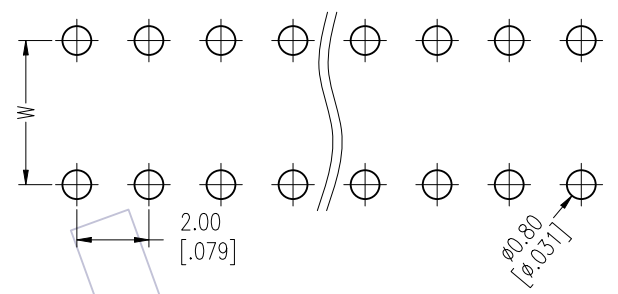

Ordering Information

1220-11 XX XX U XXX X 0 XX

- | | | | | | |
|------------|--|-------------------------|-----------|--------------------|------------|
| No.of Pins | Contact Plating | Pin Length | Insulator | Packing | Series No. |
| 02~40 | G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin
SM=Matte Tin | L=W+2A+1.5
Standard: | C=PA9T | 0=PE Bag
T=Tube | 01~99 |

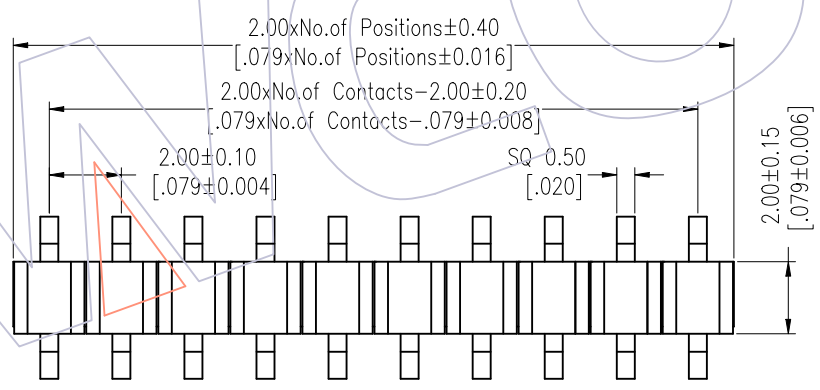

Item	Pin Length	W	A	D
Standard	---	---	---	0.75
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/18	Modify P/N		X.X ±0.40	<i>Liu</i>	2018.01.18	UNIT mm		1220-11XXXXUXXXC0XX
A0	2012/04/26	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 SINGLE ROW 90° H=2.0 U-TYPE
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com