
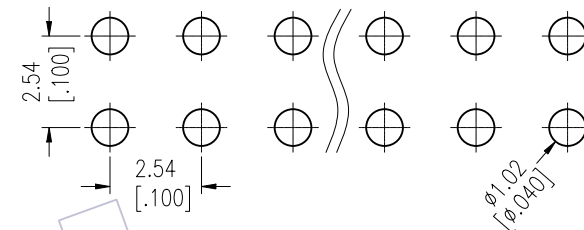


# HSF

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

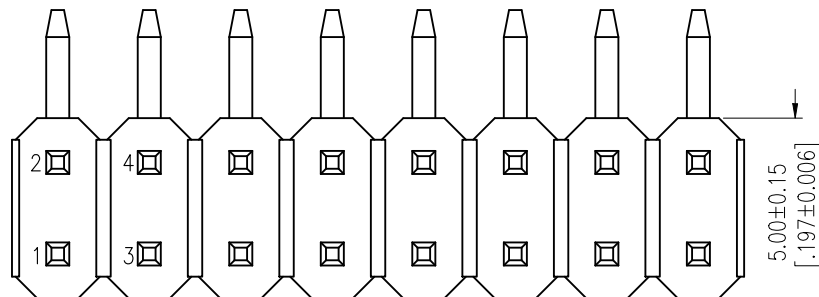

## Ordering Information

1120-12 XX XX R XXX C 0 XX A1

No. of Pins	Contact Plating	Pin Length(Short)	Insulator Material	Packing	Series No.
Per Row: 02-40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+D+3.2 Standard:134=13.4	C=PA9T	0=PE Bag T=Tube	01-99

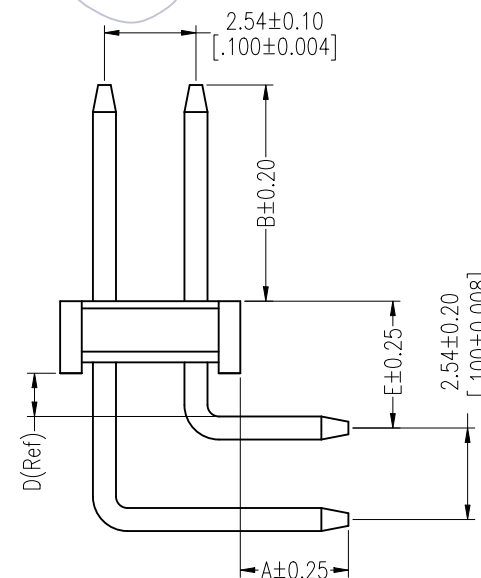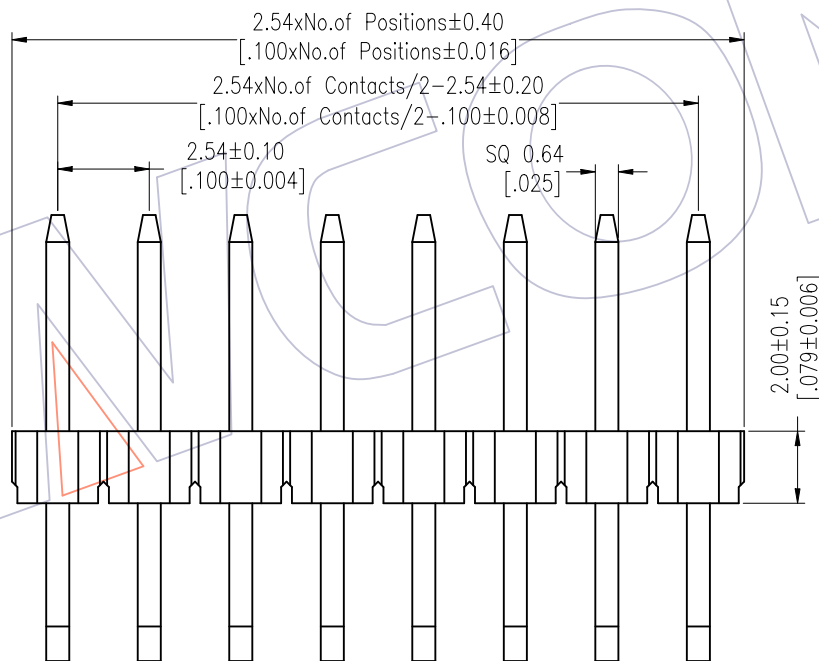

Item	Pin Length	A	E	B	Mating
Standard	13.40	3.00	3.52	6.00	2171 2185
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.X ±0.40	Ruipeng	2018/01/22	UNIT mm		1120-12XXXXRXXXC0XX
x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
x.XXX ±0.15			SHEET 1/1		PH2.54 DUAL ROW 90° H=2.0 CONCAVE BENDING
Angle ± 3°	APPROVE	DATE	PROJ.		Customer NO.
DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan      WCON-Kunshan  
 Tel: +86 769 85358920      Tel: +86 512 57468408  
 Fax: +86 769 85358915      Fax: +86 512 57468468  
 E-mail: sales@wcon.com      E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/22	Modify P/N	A1
A0	2012/05/07	NEW	-----