
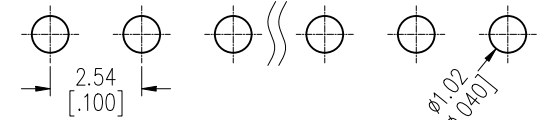


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

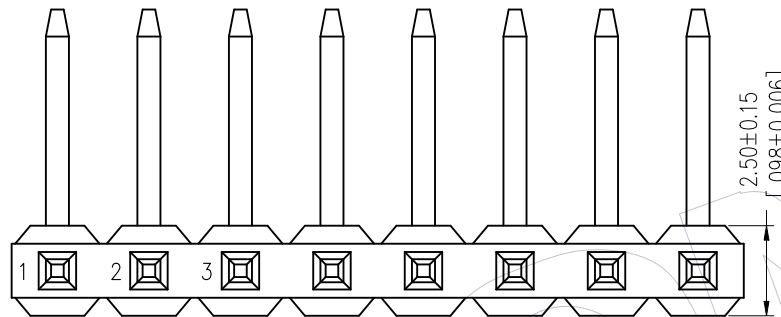

Ordering Information

1125-11 XX XX R XXX C 0 XX

- No. of Pins: 02-40
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
- Pin Length: L=A+B+D+3.75, Standard: 110=11.0, 140=14.0, 148=14.8
- Insulator Material: C=PA9T
- Packing: 0=PE Bag, T=Tube
- Series No.: 01-99

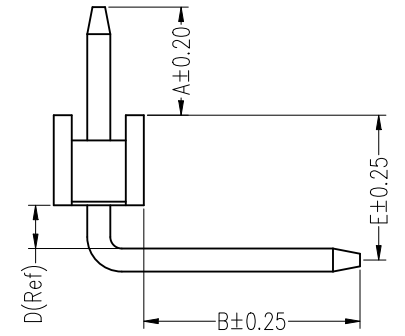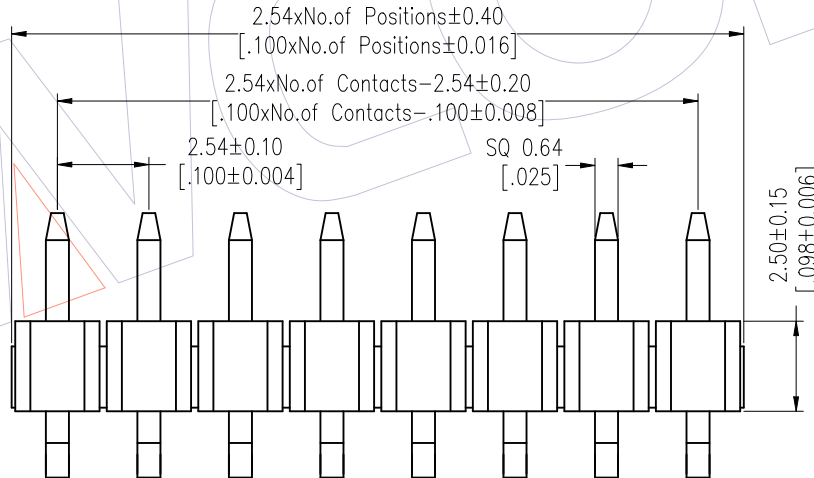

Item	Pin Length	A	E	B	Mating
Standard	11.00	3.00	4.02	3.00	2135
	14.00	3.00	4.02	6.00	2171 2185
	14.80	3.00	4.82	6.00	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/06/02	Cancel PBT & Modify P/N	A2	x.x ±0.40	Surong Xu	2018/06/02	UNIT mm		1125-11XXXXRXXXC0XX
A1	2018/01/22	Modify P/N	A1	x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 SINGLE ROW 90° PLANE BENDING H=2.5
A0	2012/05/17	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com