


HSF



NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK


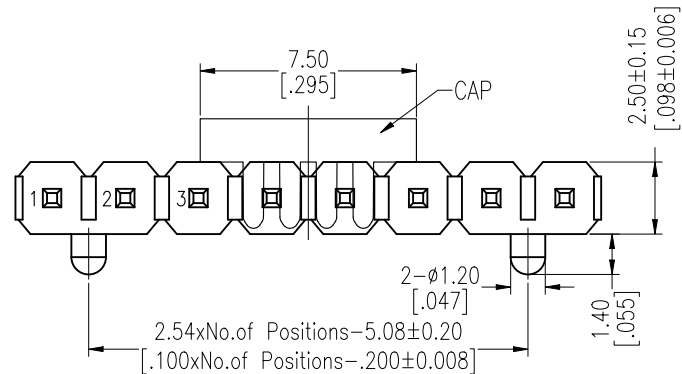


Dual Numbers

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

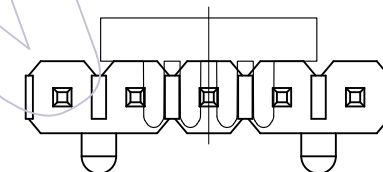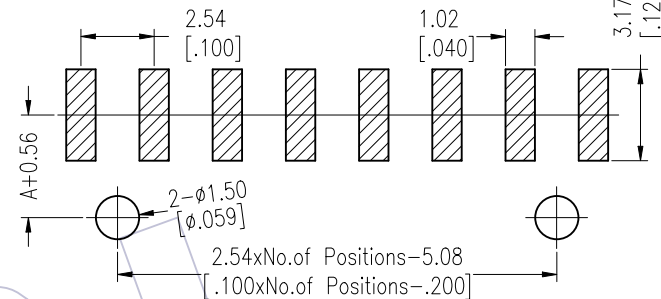

Odd Number

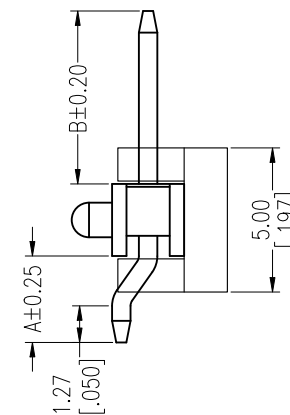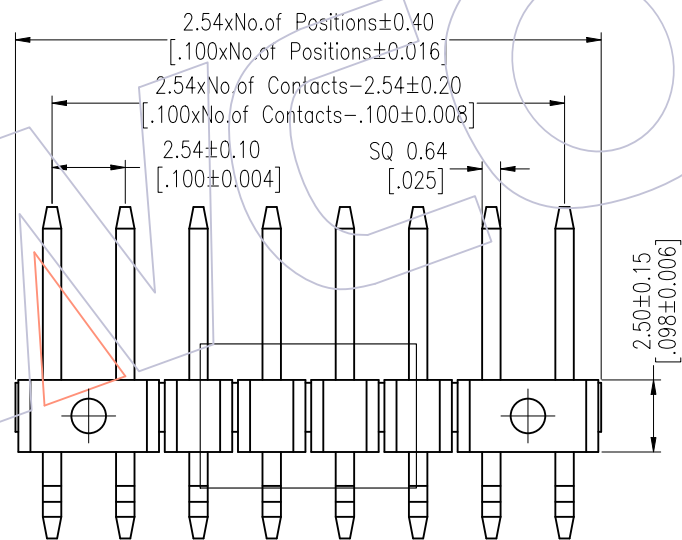

Ordering Information

1125-11 XX XX Z XXX C R XX $\triangle A1$

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+2.8 Standard:118=11.8	C=PA9T	T=Tube P=Tube+CAP R=Tape & Reel+CAP	01~99

Item	Pin Length	A	B	Mating
Standard	11.80	3.00	6.00	2171 2185
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/22	Modify P/N	$\triangle A1$	x.X ±0.40	Ruipeng	2018/01/22	UNIT mm		1125-11XXXXZXXXCRXX
A0	2012/05/17	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 SINGLE ROW 90° SMT H=2.5 WITH POST
				x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ. ϕ		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com