


HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

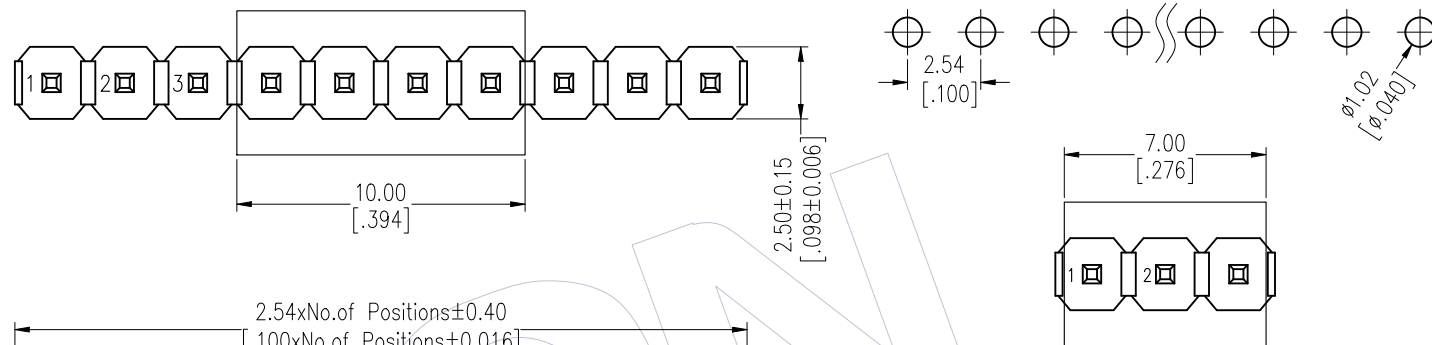

Ordering Information

1125-21 XX XX S XXX C X XX A3

No. of Pins 02~40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+C Standard:	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube P=Tube+CAP R=Tape & Reel+CAP	Series No. 01~99
----------------------	---	------------------------------------	------------------------------	--	---------------------

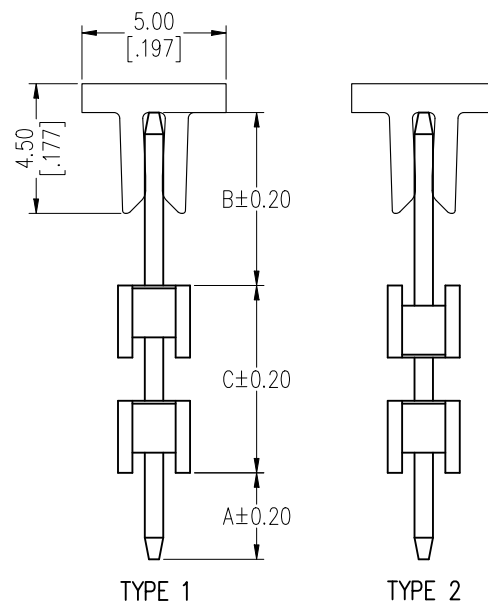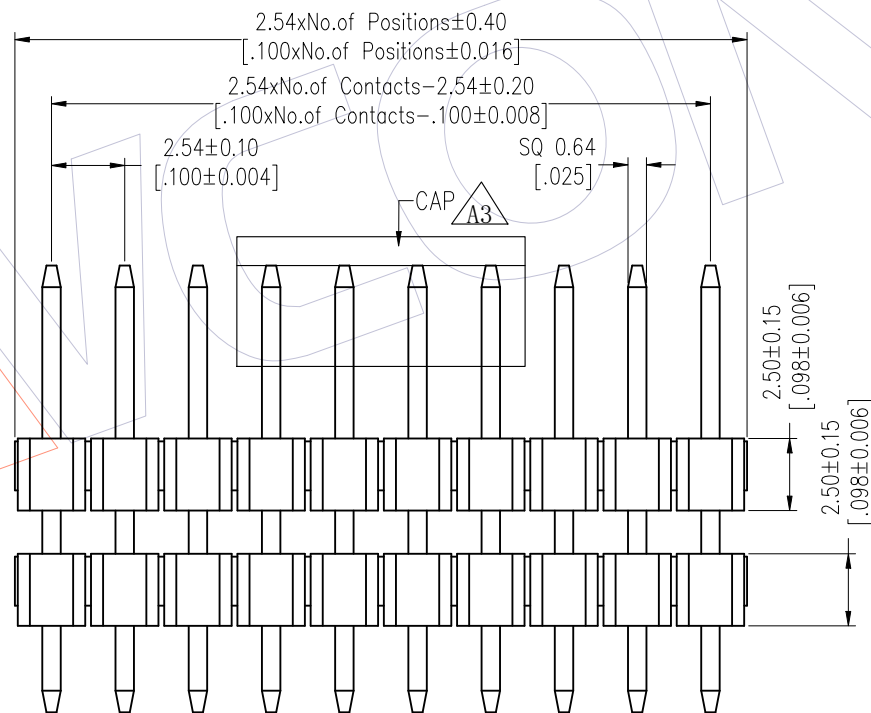

Item	Pin Length	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate					

A3	2021/01/26	Add CAP	A3	DuYing	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/06/02	Cancel PBT & Modify P/N	A2	XSR	x.xx ±0.40	DuYing	2021/01/26	UNIT	mm	1125-21XXXXXXXCXXX A3
A1	2018/01/22	Modify P/N	A1	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/05/17	NEW	-----	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 SINGLE ROW DOUBLE PLASTIC 180° H=2.5
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	ANGLE ± 3° TOL	APPROVE	DATE	PROJ.	Customer NO.	

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com