



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+33%GF UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

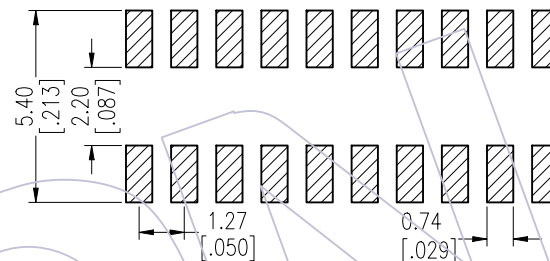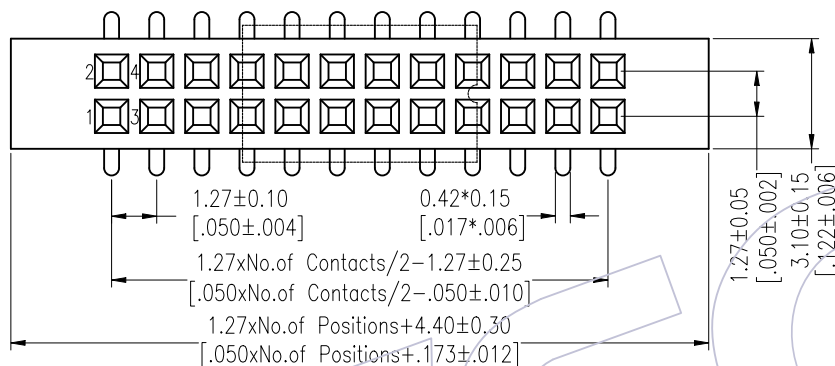



Ordering Information

2334-2 XX M XX CUN X 4

No. of Pins per Row: 02-50Pin

Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

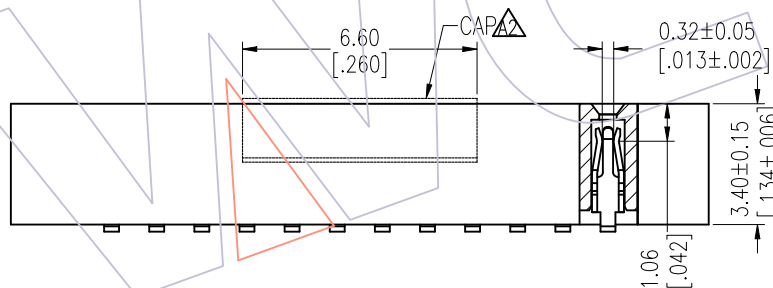

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3130
Alternate		

Pin(Per Row)	2-15P	16-30P	31-50P
M	0.10	0.15	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.
A3	2023/02/03	ADD Flatness	XSR	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
A2	2014/12/30	Modify CAP	-----	x.xx	±0.40	XSR	2023/02/03	UNIT	mm	2334-2XXMXXCUNX4
A1	2013/08/21	Modify cap 2.00 → 1.80	-----	x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/07/06	NEW	-----	x.xxx	±0.15			SHEET	1/1	1.27mm Female Header DUAL ROW 180°SMT LONG BODY H=3.40
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com