

NOTES:


Rated Current: 2.0A AC/DC
 Rated Voltage: 250V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 500MΩ min
 Operation Temperature: -25℃ to +85℃

Ordering Information

WF2001 - T P XX 0 1

B=Bronze
 P=phosphor bronze

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

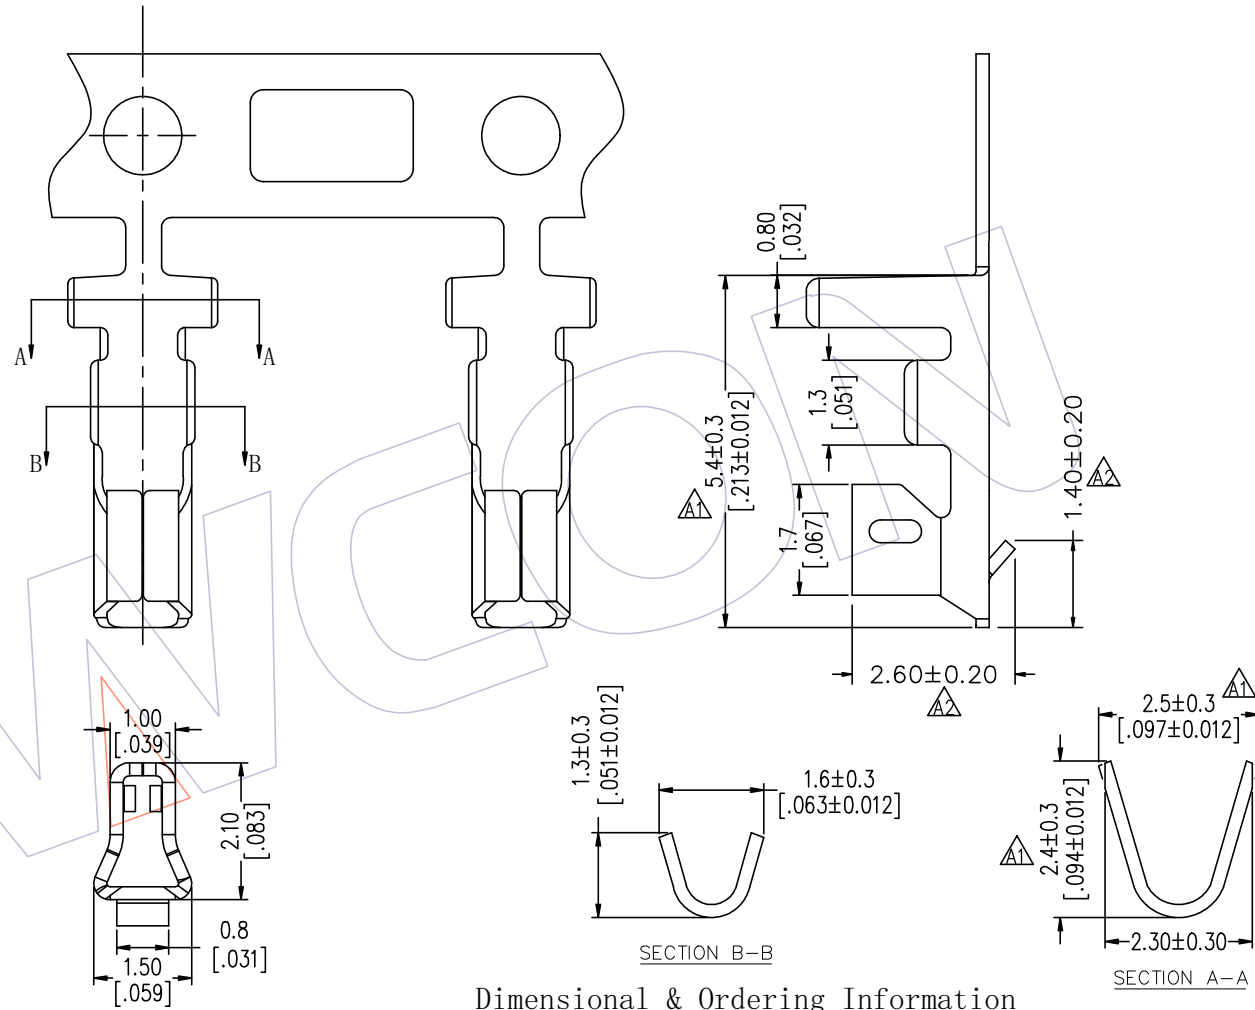

Dimensional & Ordering Information

Part No.	Thickness	Material	Finish	Wire Range	Insulation O.D	Q'ty/Reel
WF2001-TBSN01	0.20	Bronze	Tin-Plated	AWG#24~#30	1.13~1.40mm	10,000PCS
WF2001-TPSN01	0.20	Phosphor bronze	Tin-Plated	AWG#24~#30	1.13~1.40mm	10,000PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE	Customer NO.
A2	2019/05/02	MODIFY THE DIM	—	X.X	±0.40	2019/05/02	UNIT	mm	WF2001-TXXX01	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	"J" TYPE PH2.00 TERMINAL (PD4003)
A1	2013/09/02	MODIFY THE DIM	—	X.XX	±0.25	DATE	SIZE	A4			
A0	2012/09/04	NEW	—	X.XXX	±0.15	DATE	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	DATE	PROJ.	1/1			