
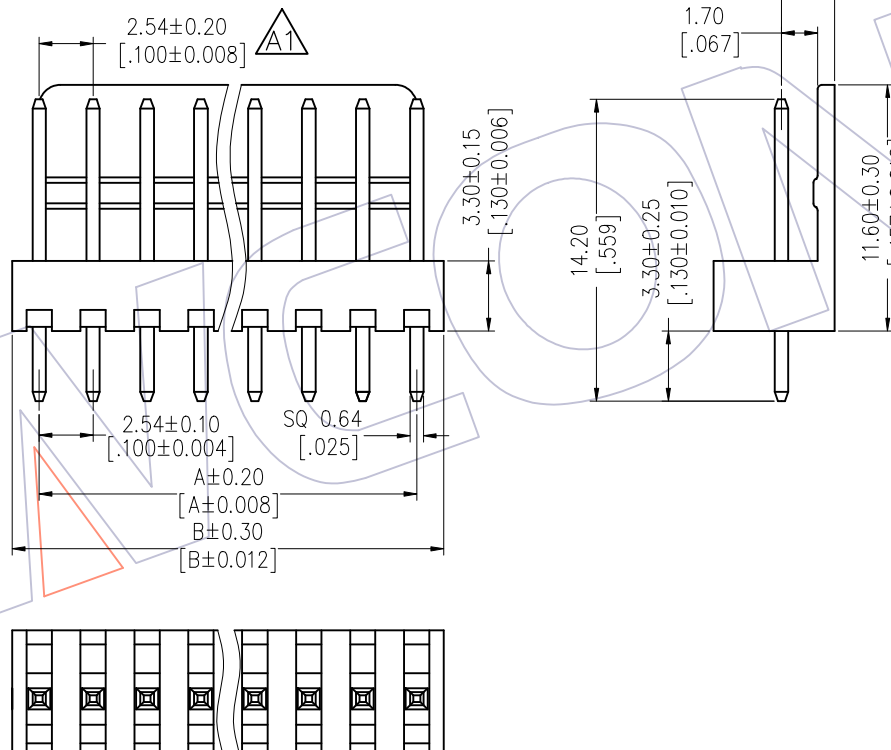



HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20m Ω Max
 Withstand Voltage: 1000V AC/minute
 Insulation Resistance: 1000M Ω Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA46 Or PA66 (UL94V-0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

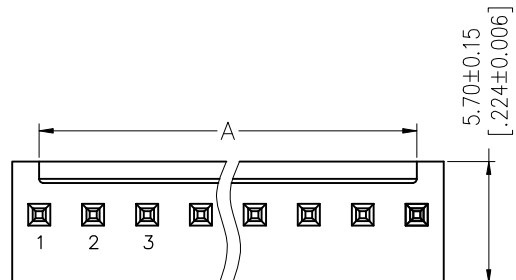

Ordering Information

WF2541 -WS XX E 0 1

No. of pins: 02-20P
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
 Color: B=Black, E= Beige, T=Natural
 Packing: 0=PE Bag

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF2541-WS(X)02XXX01	2.54	5.08	1,000
03	WF2541-WS(X)03XXX01	5.08	7.62	1,000
04	WF2541-WS(X)04XXX01	7.62	10.16	1,000
05	WF2541-WS(X)05XXX01	10.16	12.70	1000
06	WF2541-WS(X)06XXX01	12.70	15.24	500
07	WF2541-WS(X)07XXX01	15.24	17.78	500
08	WF2541-WS(X)08XXX01	17.78	20.32	500
09	WF2541-WS(X)09XXX01	20.32	22.86	400
10	WF2541-WS(X)10XXX01	22.86	25.40	400
11	WF2541-WS(X)11XXX01	25.40	27.94	300
12	WF2541-WS(X)12XXX01	27.94	30.48	300
13	WF2541-WS(X)13XXX01	30.48	33.02	300
14	WF2541-WS(X)14XXX01	33.02	35.56	300
15	WF2541-WS(X)15XXX01	35.56	38.10	200
16	WF2541-WS(X)16XXX01	38.10	40.64	200
17	WF2541-WS(X)17XXX01	40.64	43.18	200
18	WF2541-WS(X)18XXX01	43.18	45.72	200
19	WF2541-WS(X)19XXX01	45.72	48.26	200
20	WF2541-WS(X)20XXX01	48.26	50.80	200

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Du Ying	DATE 2020/05/05	SCALE	FIT	PART NO. SEE TAB
				X.X	±0.40					
A1	2020/05/05	Add Dimension	△A1	X.XX	±0.25	CHECK	DATE	UNIT mm inch	A4	TITLE: "M"TYPE 2.54 Wafer 180°
AO	2012/09/08	NEW	JYHuang	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle	± 3°			PROJ.		
				DIM	TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com