
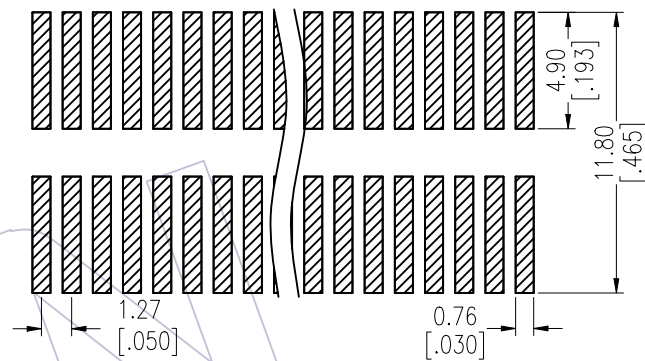


HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

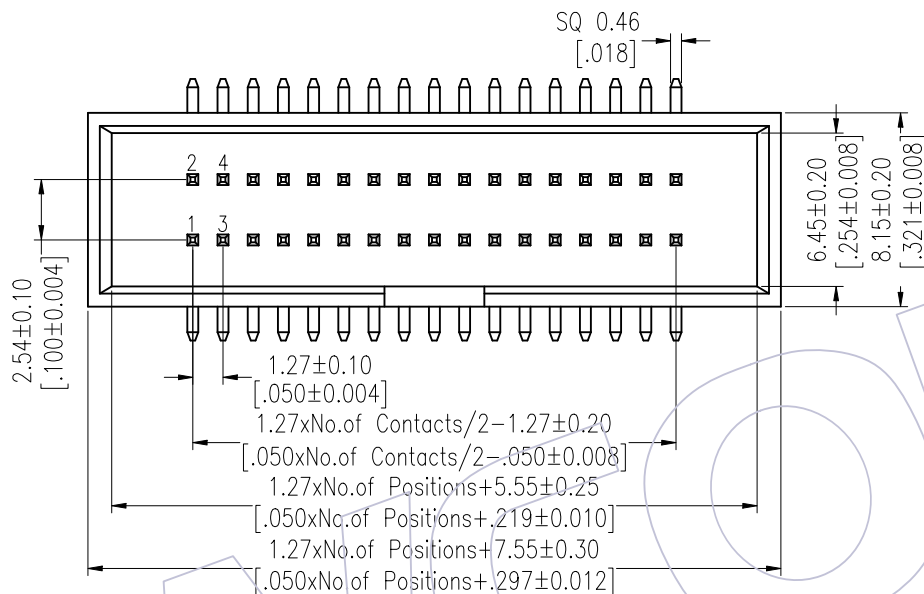

Ordering Information

3143-XX M XX B K00 X 1

No.of Pins	Contact Plating	Color	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold	W=White	
16 44	G4=15u"Gold		
20 50	G5=30u"Gold		
24 60	S0=Gold Flash/Tin		
26 64	S3=10u"Gold/Tin		
30 80	S4=15u"Gold/Tin		
100	S5=30u"Gold/Tin		
	SN=Tin		

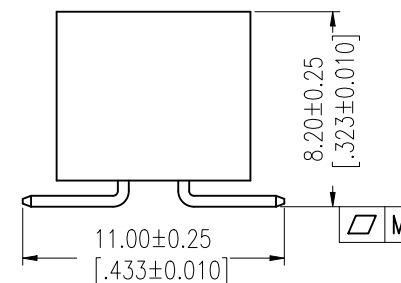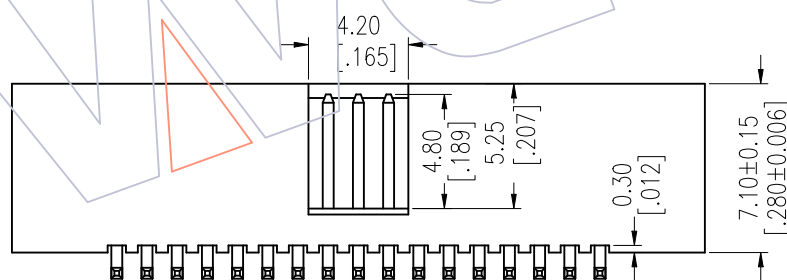

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

PIN(PerRow)	M		
	10-20P	24-40P	44-100P
	0.10	0.12	0.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2023/02/16	Add Flatness	△A1	DuYing	DuYing	2023/02/16	UNIT	mm	3143-XXMXXBK00X1
A0	2012/09/18	NEW		JYHuang	CHECK	DATE	SIZE	A4	TITLE: 1.27*2.54 BOX HEADER SMT H=7.10
				Angle	APPROVE	DATE	SHEET	1/1	Customer NO.
				DIM	TOL		PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com