
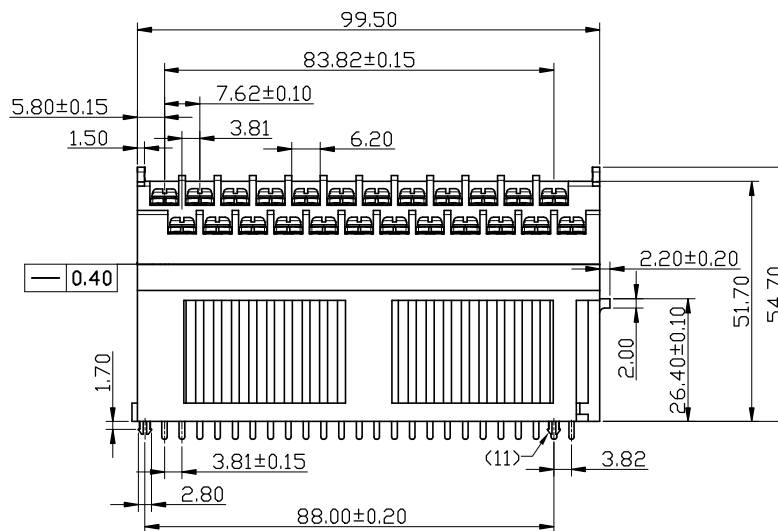
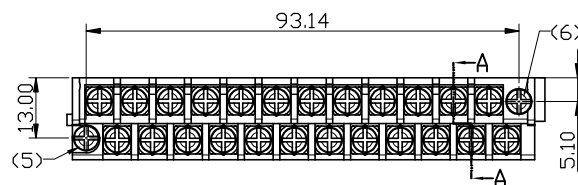




HSF

NOTES:

1. Body material: PBT+G.F, UL94 V-0
2. Contact material: C5210-1/2H,
Plated: Gold Flash(Contact Area or Overall) Over Ni
3. Pin material: C5210-1/2H,
Plated: Gold Flash(Contact Area or Overall) Over Ni
4. Rated Voltage: 250V
5. Rated Current: 10A
6. Contact Resistance: 8mΩ Max
7. Insulation Resistance: DC500V 1000MΩ Min
8. Withstand Voltage: AC2500V/1min
9. Operation Temperature: -40°C to +90°C

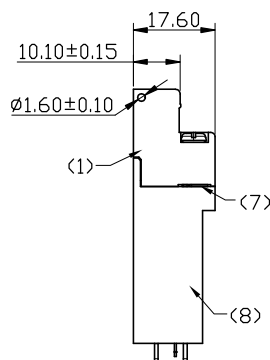

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

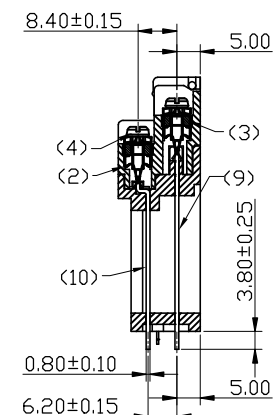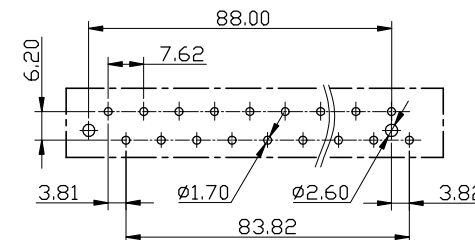


SECTION A-A


Ordering Information:

BH762 - 08 - 24 - G - G0 - S01

Type Code: 08
No. Pin Per Row: 24P
Color: G=Grey
Journal Number: 24
Contact Plated: G0=Gold Flash

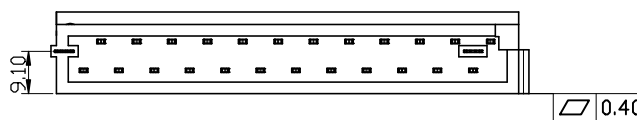

(11)	Male Stator	TBG072-PSM002	2	镀锡
(10)	Male Short Contact	TBP072-P1G0012	12	C5210,T=0.80mm
(9)	Male Long Contact	TBP072-P1G0011	12	C5210,T=0.80mm
(8)	Male Housing	GBM762-12A3G08N	1	PBT+35%GF UL94-V0
(7)	Circlip	OW407-SNI001	2	65Mn 6.0*2.5*0.4
(6)	Long Lock Screw	MD030-2SNK08	1	M3.0*21.1mm,C1018
(5)	Short Lock Screw	MD030-2SNK07	1	M3.0*16.2mm,C1018
(4)	Screw	MBO30-2SNI04	2*12	
(3)	Nut	NU030-3SNI01	2*12	C1010
(2)	Female Contact	TBT072-P1G0004	2*12	C5210,T=0.25mm
(1)	Female Housing	GBF762-12A3G04N	1	PBT+35%GF UL94-V0
ITEM	Describe	Material No	Number	Material Science

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.		 Http: www.wcon.com
X.X ±0.40		Liu Hui		2020/03/03		UNIT		mm		BH762-08-24-G-G0-S01		
X.XX ±0.25		CHECK		DATE		SIZE		A4		TITLE:		
X.XXX ±0.15		APPROVE		DATE		SHEET		1/1		7.62*6.20mm,Pluggable Terminal Block, Dual Row,DIP Type,W=8.40mm,H=54.70, 2X12P		
Angle ± 3°						PROJ.		Customer NO.		Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL						WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
										WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com		