



HSF

TECHNICAL SPECS:

Current Rating:1.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength: Min 1000V_{RMS}
 Mechanical Life: Min 100 cycles
 Connecting Pin:∅0.64mm
 Operation Temperature:-40°C to+105%

Contact:Brass CuZn36Pb3(C36000)
 Contact plating:Au or Sn over Ni
 Insulator Material:PPS+30%G.F(UL94V-0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

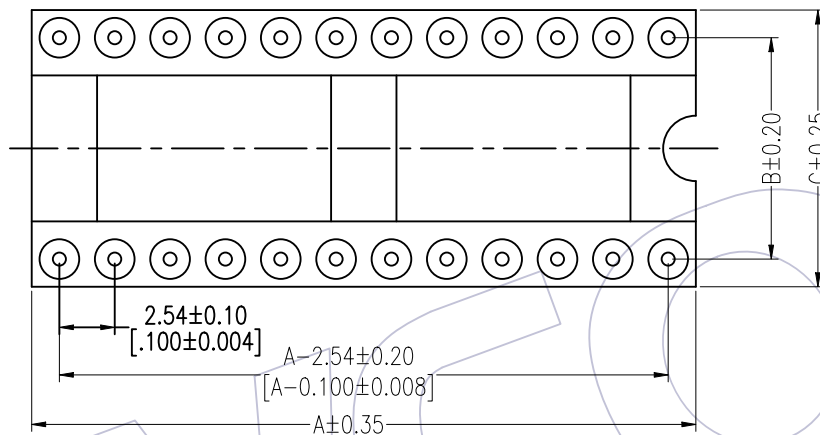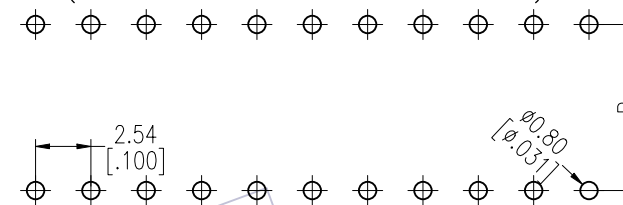


Dimensional & Ordering Information

NO.of Poles	Part No.	Dimension		
		A	B	C
50	3560-30550SXX122X1	63.50	22.86	25.40
52	3560-30552SXX122X1	66.04	22.86	25.40
64	3560-30564SXX122X1	81.28	22.86	25.40

Ordering Information

3560-305 XX S XX 122 X 1

Row of Pitch 5=22.86mm
 No. of Pin See tab
 Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold
 Packing T=Tube A=Tray

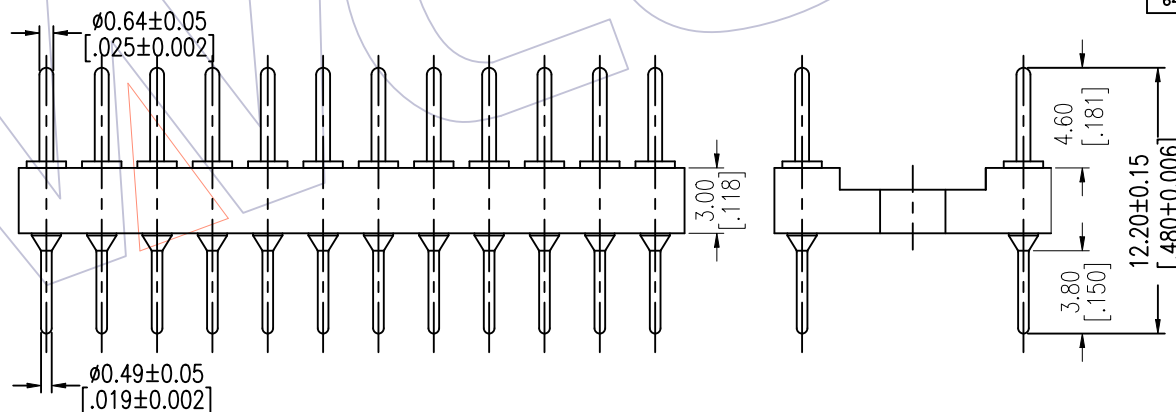

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				Angle	± 3'					
A0	2012/11/05	NEW	-----	x.x	±0.40	CHECK	DATE	SIZE	A4	SEE TAB
				x.xx	±0.25	APPROVE	DATE	SHEET	1/1	TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=12.2 Row of Pitch 22.86
				x.xxx	±0.15			PROJ.	⌀	Customer NO.
				DIM	TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com