

HSF

NOTES:

Current Rating: 1AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 250V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor
 Bronze(C5191-H)
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA9T+30%GF(UL94V-0)


Ordering Information

WF1271-1 WR H XX S0 B T 1

No. of Pins
4-50 PIN

Contact Plating
S0=Gold Flash/Tin

Packing:
T=Tube

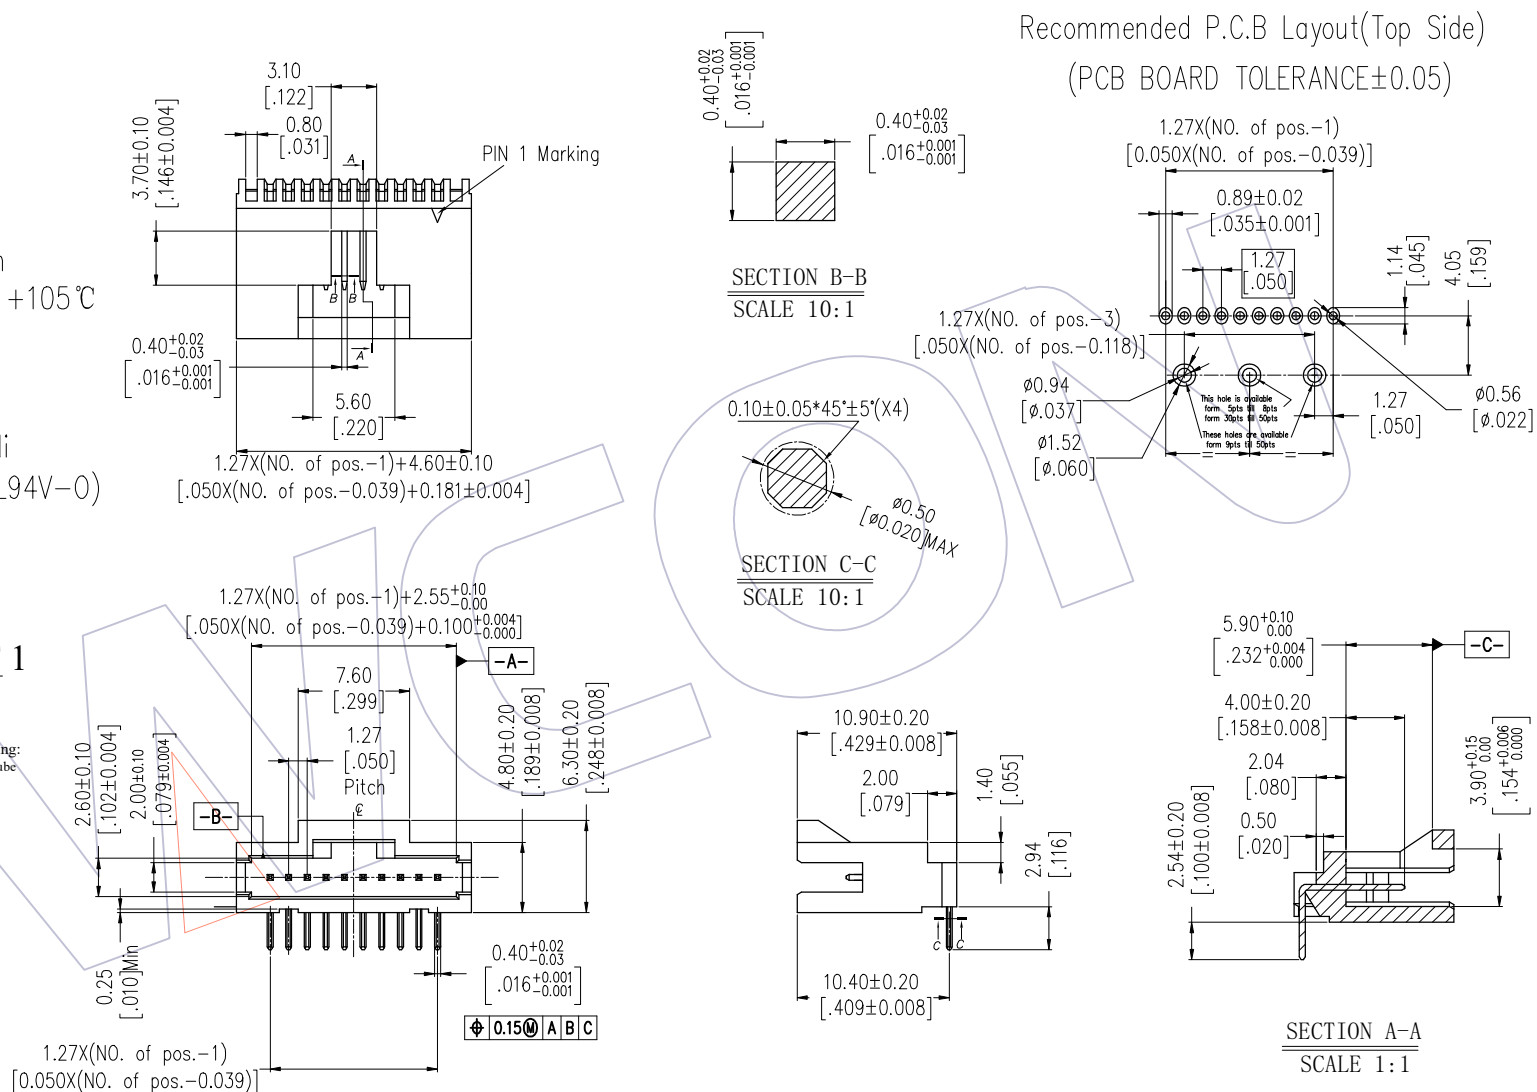

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2016/07/17	UNIT	mm	WF1271-1WRHXXS0BT1
				X.XX ±0.25	CHECK	DATE	SIZE	inch	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Wafer Conn
AO	2016/07/17	NEW		Angle ± 3°			PROJ.	Customer NO.	90° Dip Without Ear
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--