


HSF

NOTES:

Current Rating: 1AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 250V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze (C5191-H)
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA9T+30%GF (UL94V-0)
 Fixing Hardware Material: Phosphor Bronze
 Fixing Hardware plating: Au or Sn over Ni
 Plating

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

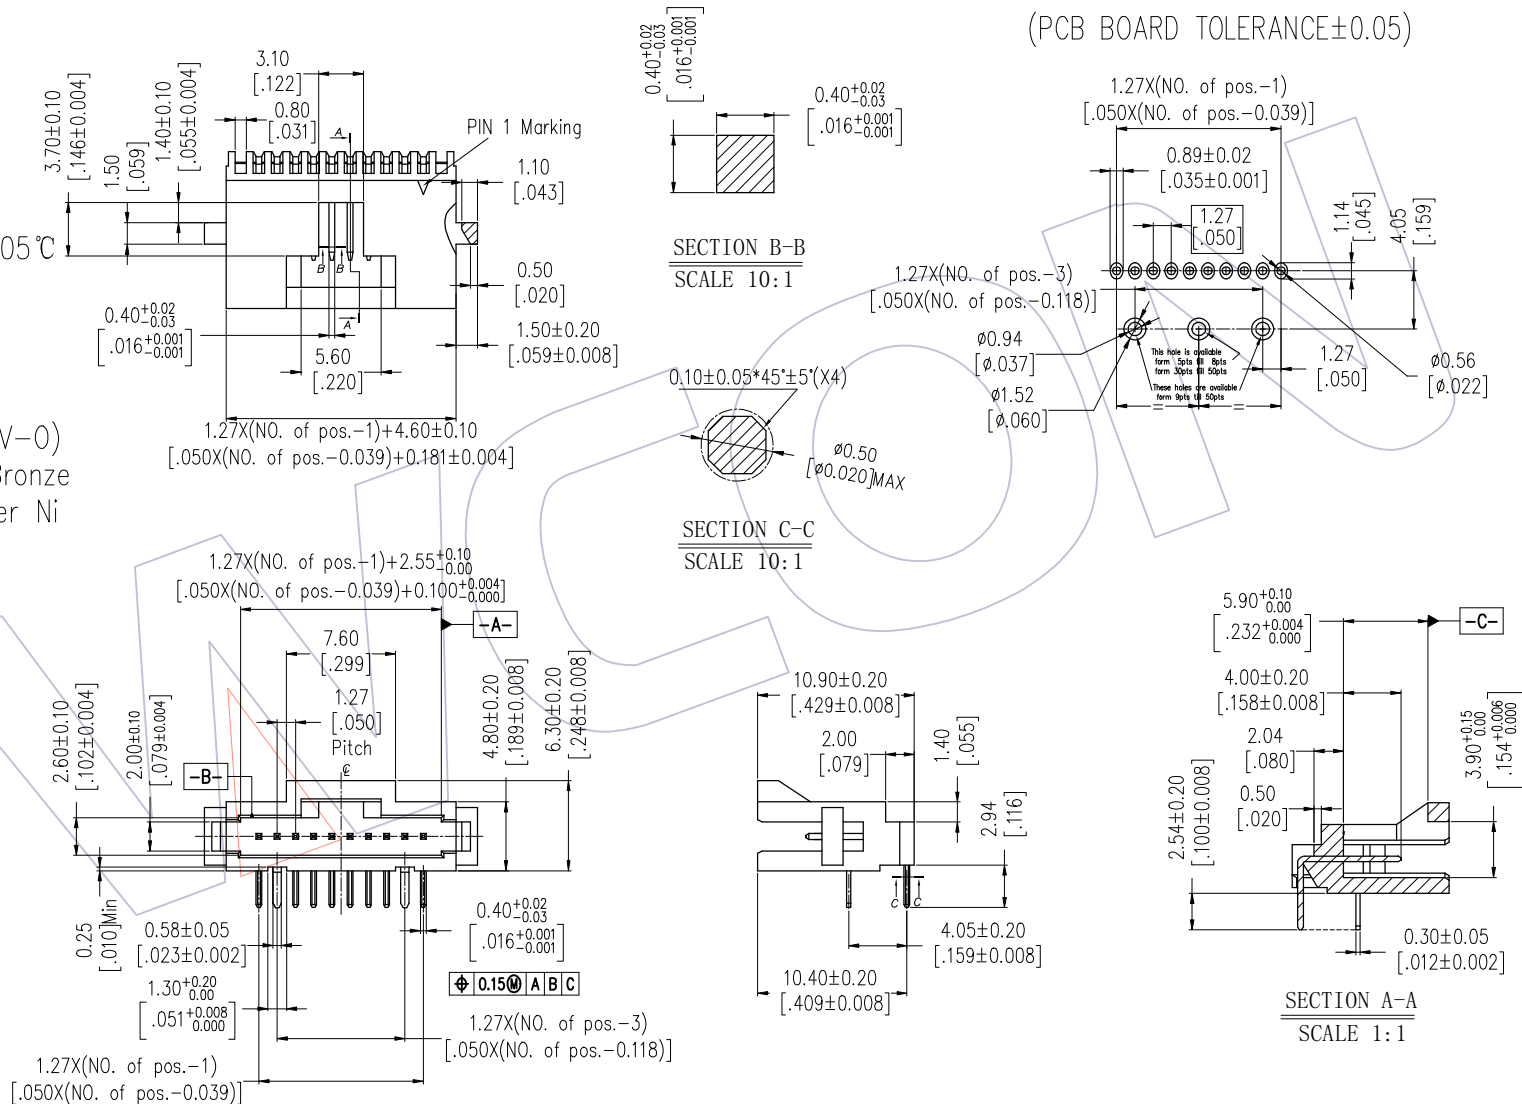

Ordering Information

WF1271-1 WR H XX S0 B T 2



				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2016/071/17	UNIT	mm	WF1271-1WRHXXS0BT2
				X.XX ±0.25	CHECK	DATE	SIZE	inch	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Wafer Conn
AO	2016/07/17	NEW		Angle ± 3°			PROJ.	Customer NO.	90°DIP TYPE With Ear
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com