

HSF

NOTES:


Current Rating:1AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor
 Bronze(C5191-H)
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%GF(UL94V-0)
 Fixing Hardware plating:Au or Sn over Ni
 Plating

Ordering Information

WF1271- 1 WR H XX S0 B T 3

No.of Pins
4-50 PIN
Contact Plating
S0=Gold Flash/Tin
Packing:
T=Tube

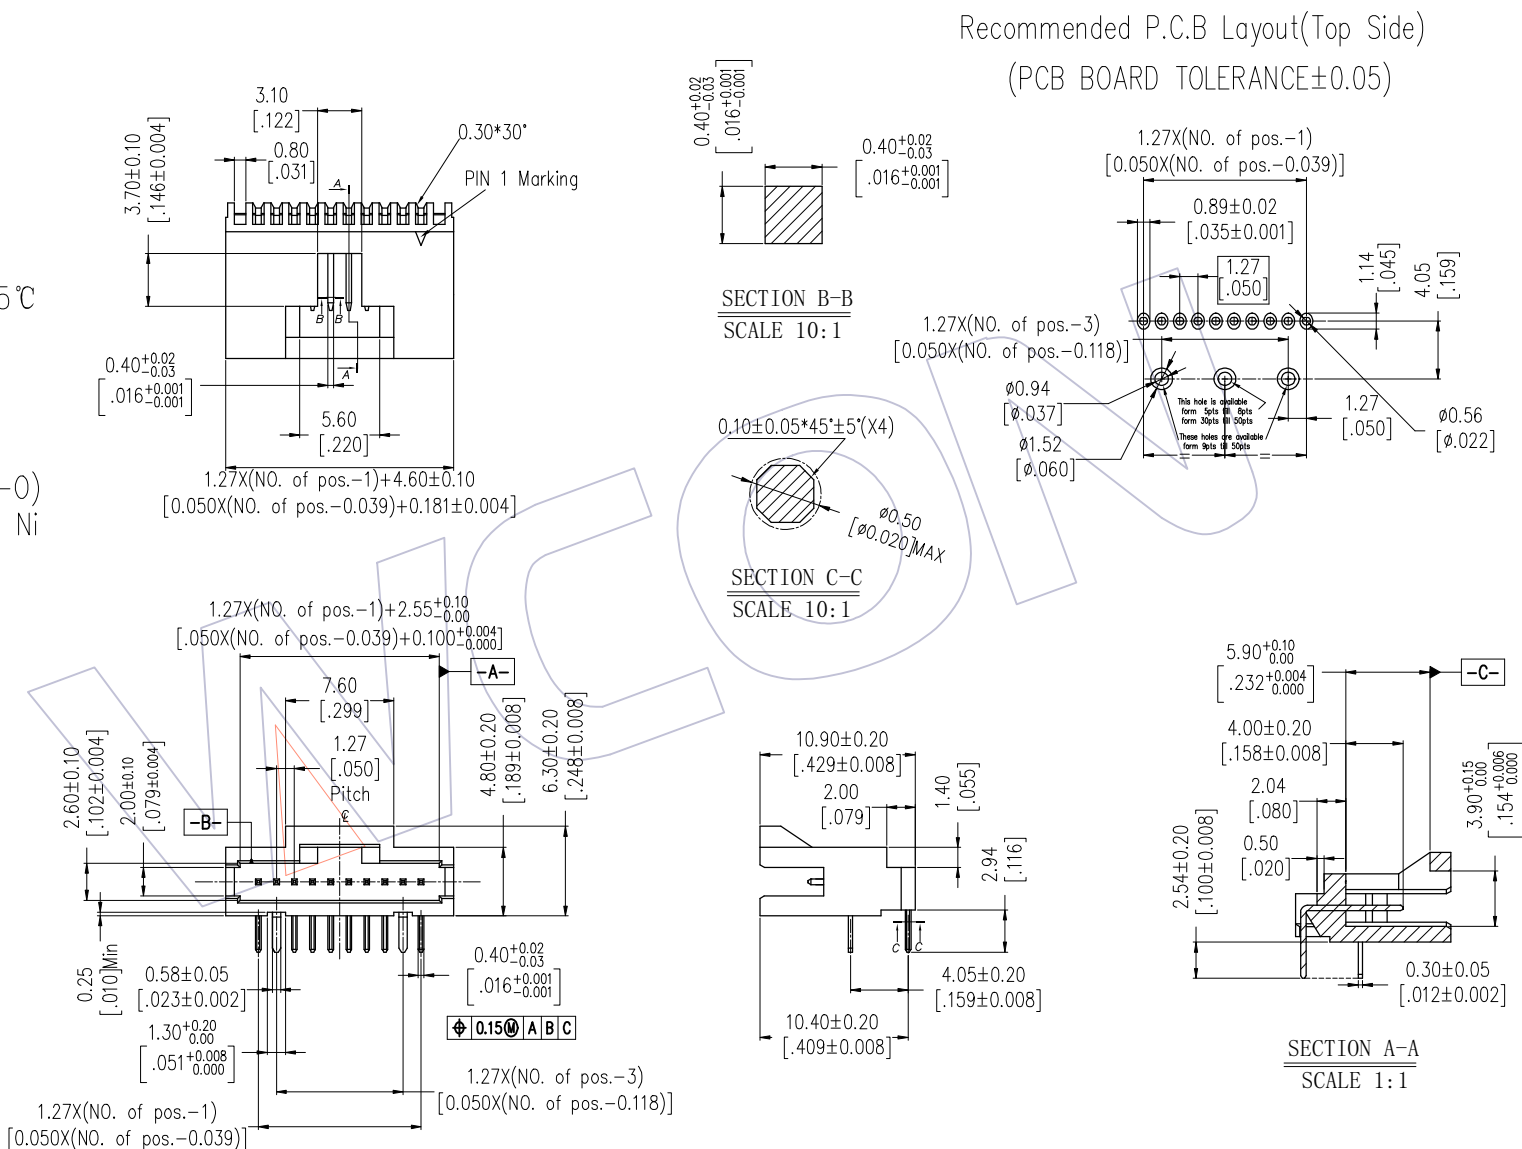

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2016/07/17	UNIT	mm	WF1271-1WRHXXS0BT3
				X.XX ±0.25	CHECK	DATE	SIZE	inch	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Wafer Conn
AO	2016/07/17	NEW		Angle ± 3°			PROJ.	Customer NO.	90°DIP TYPE With Fixing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesk@wcon.com
---	---