

HSF

NOTES:


Current Rating:1A AMP
 Contact Resistance:30milliohm Max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C to +105°C

Housing Material:PA9T+33%GF(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni Plating


Ordering Information

WF1271 - 2WRH **XX** **B** **X** 1



No. of pins Per Row 04-50P
 Contact Plating S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold Blank=Tin
 Color B=Black
 Packing T=Tube R=Tape&Reel

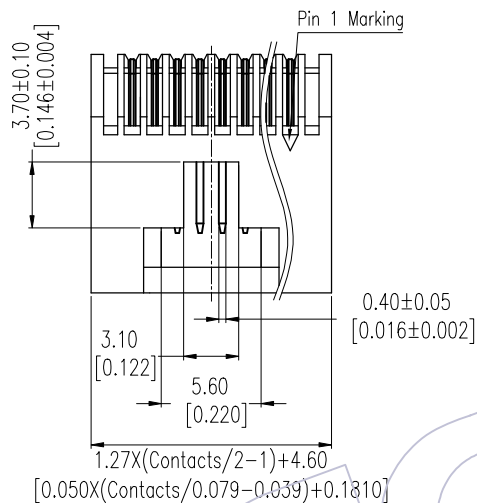


Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE ±0.05)

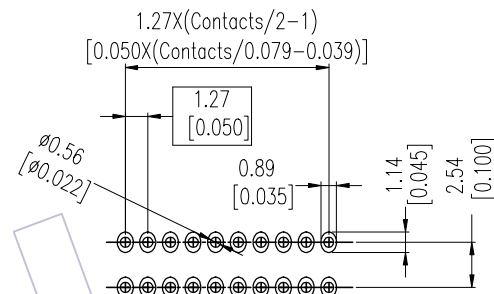

1.27X(Contacts/2-1)+2.55±0.20
 [0.050X(Contacts/0.079-0.039)+0.100±0.008]

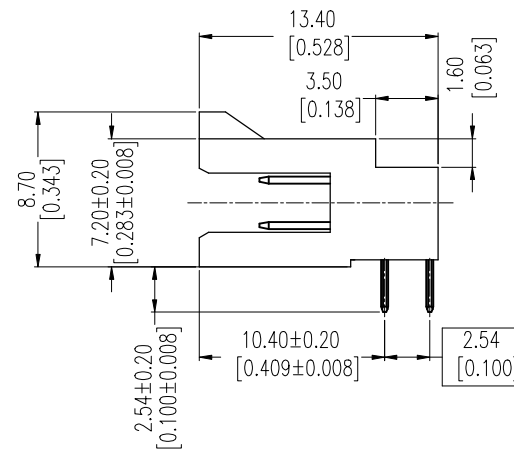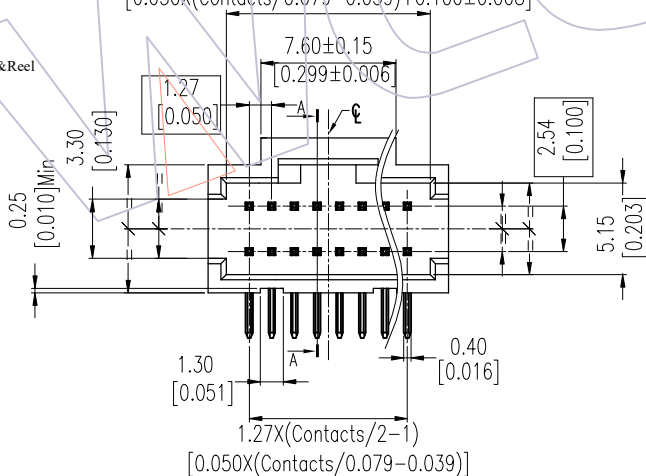

				OPERATION		DRAW Ding	DATE 2017/01/09	SCALE FIT	PART NO. WF1271-2WRHXXBX1	 Http: www.wcon.com		
				x.x	±0.40							CHECK
				x.xx	±0.25	APPROVE	DATE	SIZE	A4	Customer NO.	Fax: +86 769 85358915	
AO	2017/01/09	NEW		x.xxx	±0.15			CHANGE				SHEET
REV	DATE	MODIFICATION DESCRIPTION		Angle	± 3'	DIM	TOL			PROJ.	