

HSF

SPECIFICATIONS:


Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V DC,10s
 The Cable Assembly Must 100% Test

CABLE:

Insulator: UL 2651, Grey Red Side
 Contact: 28AWG(7/0.12mm)

IDC:

Insulator Material: PBT+30%G.F UL94V-0
 Contact Material: Brass
 Contact Plating: Au over Ni

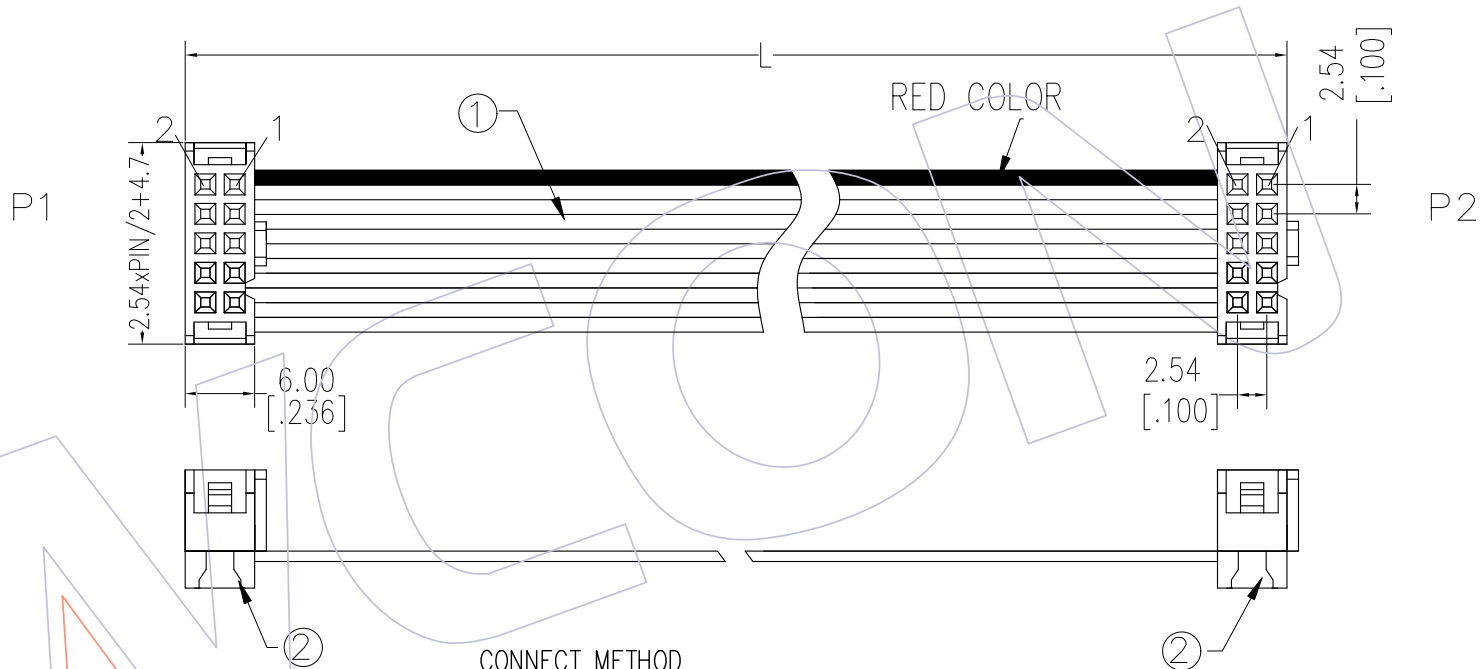

Ordering Information

FA12 - XX XX A A X XXX - 41

No.OF Pins
06-64p

Contact Plating:

- G0=Gold Flash
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Sel.Gold Flash/Ni
- S3=Sel.10u"Gold/Ni
- S4=Sel.15u"Gold/Ni
- S5=Sel.30u"Gold/Ni
- SN=Tin

Connector Color:

- B=Black
- G=Grey 427C

Connector Direction:
A=Same Direction

Length of Line(mm)

CONNECT METHOD

P1	Red	P2
1	Grey	1
2	Grey	2
3	Grey	3
	•••	
XX	Grey	XX

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

②	5211-XXDBXXXW01	CONN.	2.54 IDC XXP (Double Contact) PBT BK/GREY,With Bump Brass Plating Xu" Au/Ni	2	PCS
①	F1U-C28GXXD0-XXXX-X	WIRE	UL2651 PH1.27mm XXP 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXX	MM
NO.	PART NO.	NAME	TITLE	QTY	UNIT

		OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
		x.x ±0.40	XSR	2020/10/12	UNIT	mm	FA12-XXXXAAXXXX-41
		x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
		x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54mm IDC W/O SR Drawing
AO	2020/10/12	NEW			PROJ.		Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--