



HSF

SPECIFICATIONS:
 Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V DC,10s
 The Cable Assembly Must 100% Test
CABLE:
 Insulator: UL 2651,Grey Red Side
 Contact: 28AWG(7/0.12mm)

IDC:
 Insulator Material: PBT+30%G.F UL94V-0
 Contact Material: Brass
 Contact Plating: Au over Ni

P1

P2

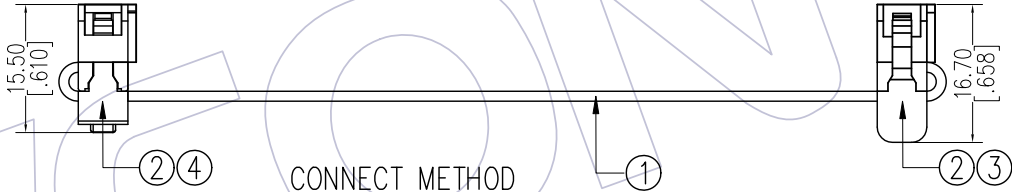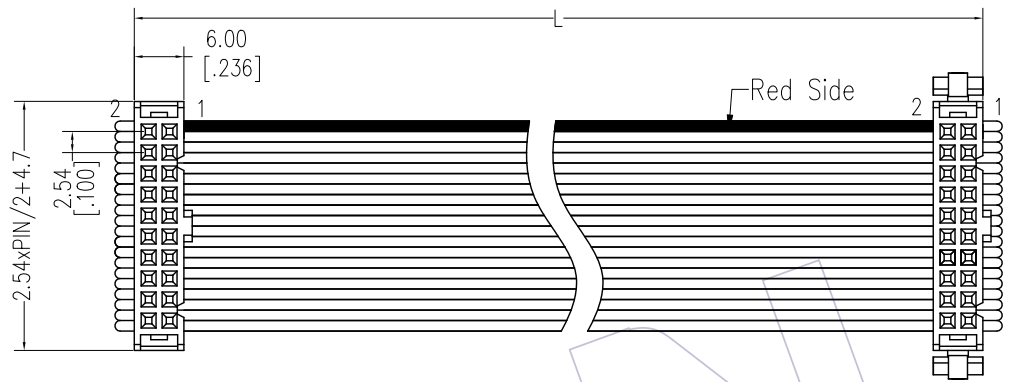

Ordering Information

FA12 - XX XX A A X XXX - 45

No.OF Pins 06~64p
 Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Sel.Gold Flash/Ni
 S3=Sel.10u"Gold/Ni
 S4=Sel.15u"Gold/Ni
 S5=Sel.30u"Gold/Ni
 SN=Tin

Connector Color:
 B=Black
 G=Grey 427C

Connector Direction:
 A=Same Direction

Length of Line(mm)

CONNECT METHOD

P1	Red	P2
1	Grey	1
2	Grey	2
3	Grey	3
	⋮	
XX	Grey	XX

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

NO.	PART NO.	NAME	TITLE	QTY	UNIT
④	G5210-XXDX01	SR	2.54 IDC SR,XXP,PBT BK/GREY	1	PCS
③	G5210-XXDX02	SR	2.54 IDC Butterfl SR,XXP,PBT BK/GREY	1	PCS
②	5211-XXDBXXXW01	CONN.	2.54 IDC Socket,XXP,Double Contact,W/T Bump,PBT BK/GREY,Xu" Au/Ni	2	PCS
①	F1U-C28GXDX0-XXXX-X	WIRE	1.27 Flat Cable,XXP,PVC Grey,Red Side,UL2651,28AWG(7/0.12)	XXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.	TITLE:	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
AO	2020/12/04	NEW	-----	X.X ±0.40	XSR	2020/12/04	UNIT	mm [inch]	FA12-XXXXAAXXXX-45			
				X.XX ±0.25	CHECK	DATE	SHEET	A4				
				X.XXX ±0.15	APPROVE	DATE	PROJ.	1/1				
				Angle ± 3'					Customer NO.			
				DIM TOL								



Http: www.wcon.com