


HSF

SPECIFICATIONS:

Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V AC
 The Cable Assembly Must 100% Test

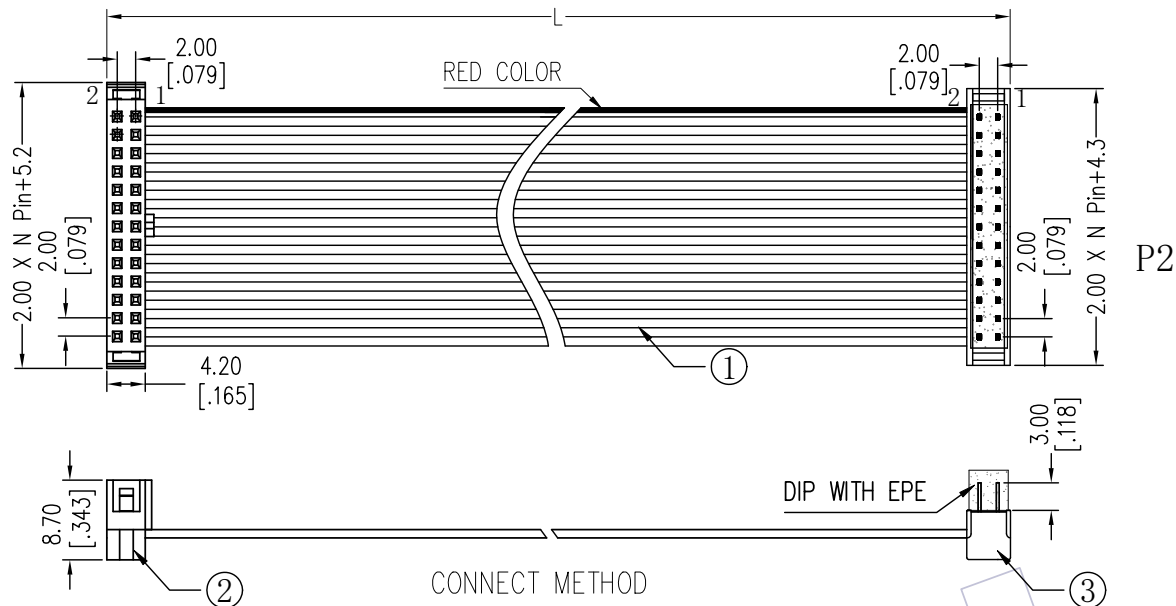


Ordering Information

FB22 - XX XX F A B XXX - 01

No. OF Pins: 06~64p
 Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Tin
 Connector Color:
 B=Black
 Length of Line(mm)
 Wcon Code 01~99
 Connector Direction:
 F=same Direction

CONNECT METHOD



LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

NO.	PART NO.	NAME	TITLE	QT'Y	UNIT
③	5320-XXPXXB01	CONN.	2.00 DIP Plug,XP,PBT BK,P/Bronze,Xu AU/Ni	1	PCS
②	5222-XXYPXXBW01	CONN.	2.00 IDC Socket,XP, Spring Type,W/T Bump,PBT BK,P/Bronze, Xu AU/Ni	1	PCS
①	F1U-B28GXXD0-XXXX-X	WIRE	1.00 Flat Cable,XP,PVC Grey,Red Side,UL2651,28AWG(7/0.12)	-	MM

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	XSR	2020/11/09	UNIT	mm	FB22-XXXXFABXXX-01
X.XX ±0.25	CHECK	DATE	SIZE	[inch]	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	A4	2.0 DIP+2.0 IDC
Angle ± 3°			PROJ.	1/1	CUSTOMER NO.
DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2020/11/09	Change drawing frame	XSR
A0	2009/08/22	NEW	-