


HSF

HOUSING MATERIAL
 Insulation Material:PBT+30%GF(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au Over Ni

SPECIFICATIONS
 Insulation Resistance:5MΩ Min
 Contact Resistance:1.0Ω Max
 Withstand Voltage:DC 300V, 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL
 Insulation:UL 2678,Grey Red Side
 Conductor:30AWG(7/0.102mm)
 Electrical:300V

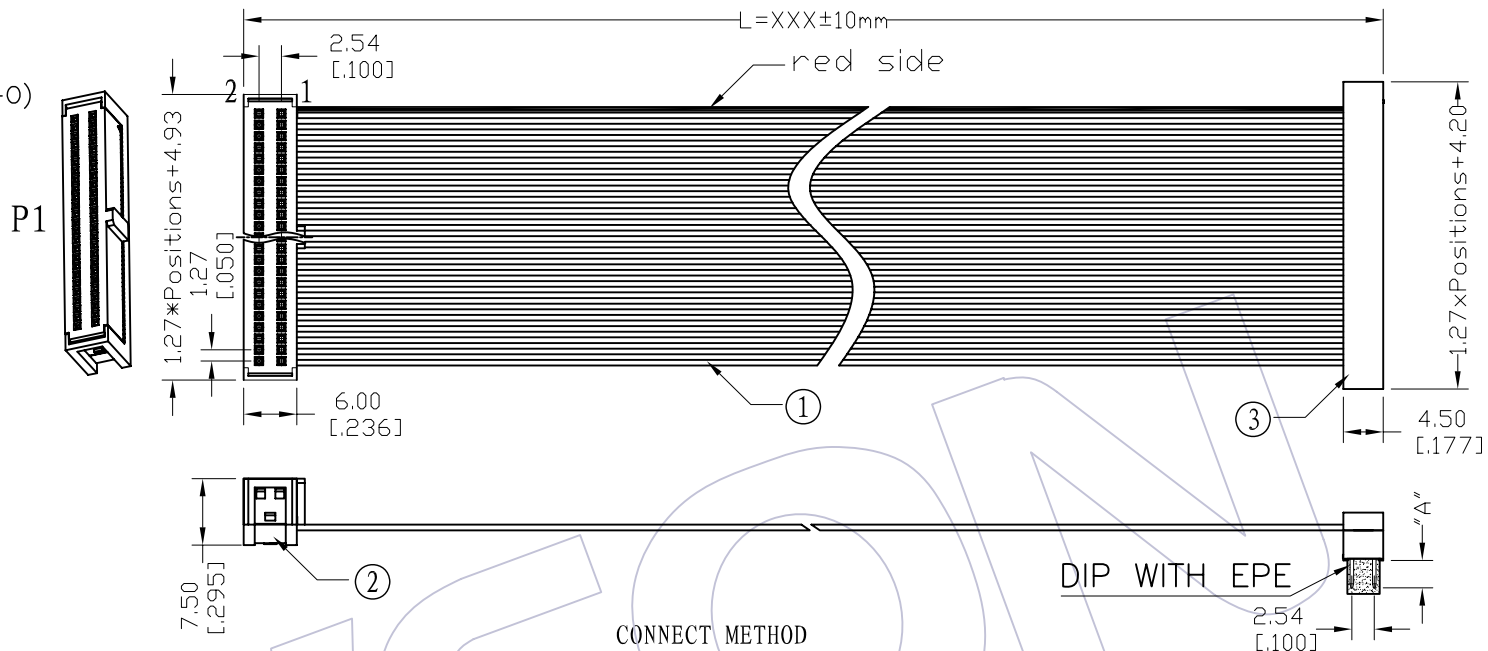

Ordering Information

FB42 - xx xx G A B xxx - 02

No.OF Pins
06~80P

Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold


Connector Direction:
 G=Opposite Direction

Connector Color:
 B=Black

Length of Line(mm)

S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Tin

CONNECT METHOD



DIP WITH EPE

PART NO.	DIM"A"
5340-XXPXXB01	3.10
5340-XXPXXB02	1.90

③	5340-XXPXXB0X	CONN.	1.27*2.54 DIP **P PBT Black Phosphor Bronze Plating Xu" gold	1	SET
②	5242-XXYPXXBW01	CONN.	1.27*2.54 IDC **P PBT Black With Bump Phosphor Bronze Plating Xu" gold	1	SET
①	F3U-A30GXXD0-XXXX-1	WIRE	UL2678 PH0.635mm XXP 30AWG(7/0.102TC) PVC Grey Marking Red Side	XXXX	MM
NO.	PART NO.	NAME	TITLE	QT'Y	UNIT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	BEN	09/08/20	SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD			
AO	09/08/20	NEW			X.X ±0.40	DESIGN			UNIT	mm	PART NO.	FB42 -xxxxGABxxx-02		
					X.XX ±0.25	CHECK			SIZE	A4	TITLE:	1.27*2.54 IDC Drawing		
					X.XXX ±0.15	APPROVE			SHEET	1/1	Customer NO.			
					Angle ± 3'				PROJ.	↻				
					DIM TOL									