


HSF

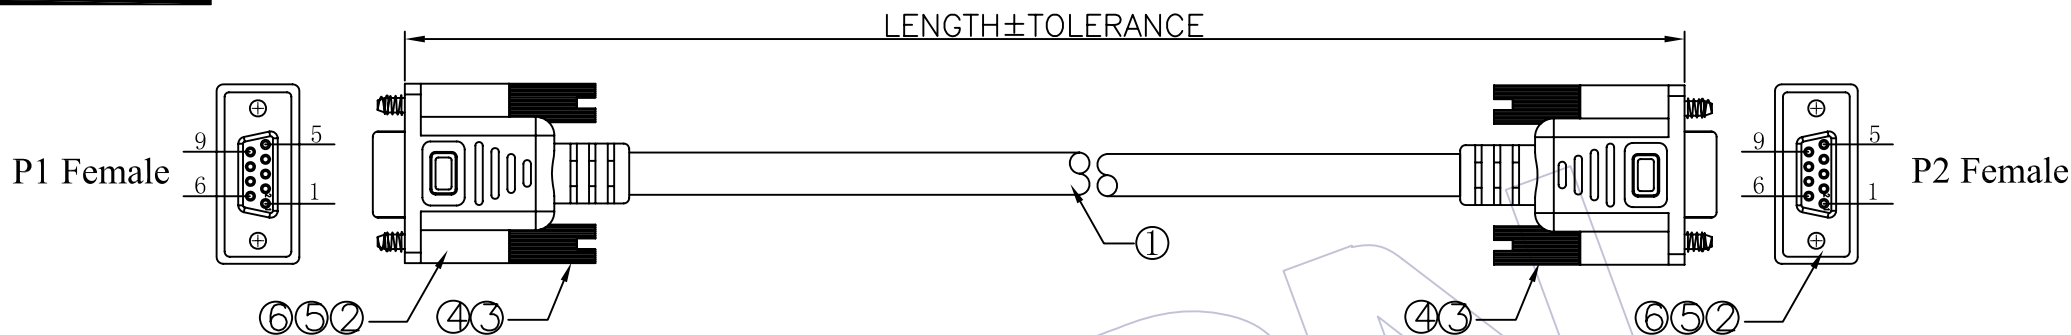

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

SPECIFICATIONS

Insulation Resistance:5M Ω Min
Contact Resistance:3.0 Ω Max
Withstand Voltage:DC 300V, 10S
The Cable Assembly Must 100% Test

CONNECT METHOD		
P1	COLOR	P2
1	White	1
2	RED	2
3	White	3
4	GREEN	4
5	White	5
6	Orange	6
7	White	7
8	Blue	8
9	White	9
Shell	Braid	Shell

Ordering Information

C9700 - 09 02 xxxx -101

No.of Pins: 09P Shape Style: 02=Both ends Process Length of Line

⑥	GPVC-B70XG01	Plastic	PVC 45P Black/Blue/Grey	0.020	KG
⑤	GPE-W00XG01	Plastic	PE WHITE	0.008	KG
④	GPVC-B60XG01	Plastic	PVC 35P Black/Blue/Grey	0.006	KG
③		Screw	4#-4UNC	4	PCS
②	6220-09FXXXX01	D-SUB	DB9P FEMALE SOLDER TYPE Black/Blue	2	PCS
①	WXXXX-XXXX00001	Cable	UL2464/2919 22~30AWG*5P+AL/MYLAR+Braid PVC Jacket Black/Blue/Grey	XXX	MM
NO.	Part No.	Name	specification	Q' TY	UNIT

					工程图 ENGINEERING	绘图 DRAW	BEN	09/11/02	SCALE 1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
					X.X ±0.30	设计 DESIGN			UNIT mm		
					X.XX ±0.20	审核 CHECK			SHEET 1/1	料号 PART NO.	C9700-0902XXXX-101
					X.XXX ±0.10	核准 APPROVE			品名 TITLE:	DB 9P/Female TO DB9P/Female	
A0	09/11/02	NEW			Angle ± 2'	核准 APPROVE			PROJ.	客户料号Customer NO.	
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	DIM	TOL					