

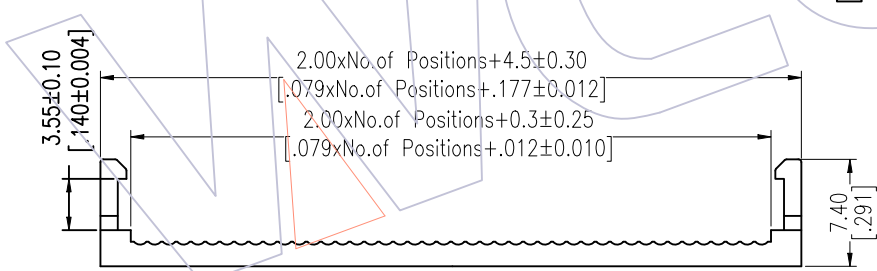
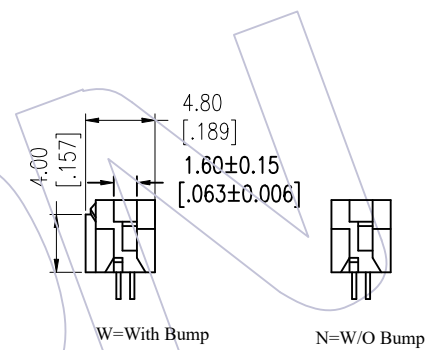
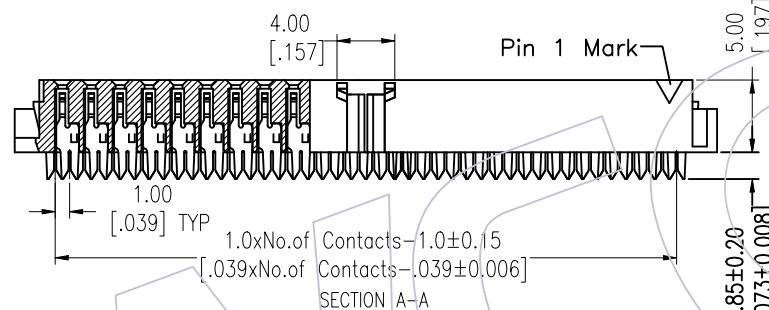



HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

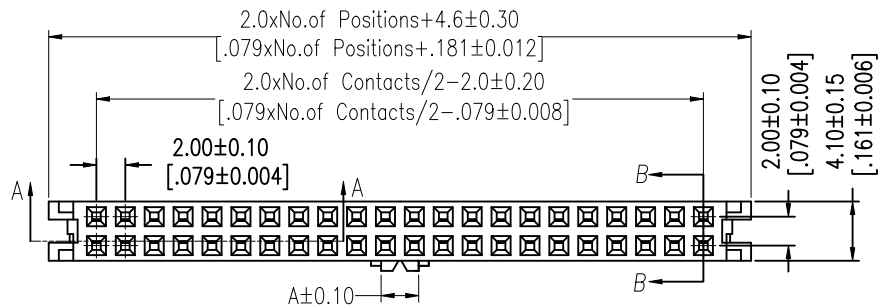

Ordering Information

5224- XX YP XX B X 01

| No. of Pins | Contact Plating | Color Insulator | Bump |
|-------------|------------------|-----------------|-------------|
| 06P 26P | S0=Gold Flash/Ni | B=Black | N=W/O Bump |
| 08P 30P | S3=10u"Gold/Ni | G=Grey(427C) | W=With Bump |
| 10P 34P | S4=15u"Gold/Ni | E=Grey(413C) | |
| 12P 36P | S5=30u"Gold/Ni | | |
| 14P 40P | SN=Tin | | |
| 16P 44P | | | |
| 18P 50P | | | |
| 20P 60P | | | |
| 22P 64P | | | |
| 24P | | | |

| Item | Pitch | Mating |
|-----------|-------|--------|
| Standard | 2.00 | 3122 |
| Alternate | | |

| Pin No. | DIM"A" |
|---------|--------|
| 8P~64P | 2.60 |
| 6P | 2.00 |

| OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-------------|---------|------------|-------|-----|------------------------------------|
| x.x ±0.40 | JYHuang | 2012/10/10 | UNIT | mm | 5224-XXYPXXBX01 |
| x.xx ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: 2.00 IDC SOCKET (F TYPE) |
| x.xxx ±0.15 | APPROVE | DATE | SHEET | 1/1 | Customer NO. |
| Angle ± 3' | | | PROJ. | | |
| DIM TOL | | | | | |

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com