

NOTES:

1. Body material: Polybutylene Terephthalate, UL94 V-0
2. Contact material: Phosphor bronze, Plated: Gold Flash/Ni
3. Pin material: Brass, Plated: Au & Sn over Ni
4. Screw material: Steel, Plated: Ni
5. Rated Voltage: 300V
6. Rated Current: 10A
7. Wire Range: 14-22AWG
8. Screw Torque: 8.0kg.cm
9. Contact Resistance: 8mΩ Max
10. Insulation Resistance: DC1000V 1000MΩ Min
11. Power-Frequency Withstand Voltage: AC2500V/1min
12. Operation Temperature: -40°C to +120°C

Ordering Information:

BH762-04-XX-X-S0-S01

No. Pin Per Row
04p-21p

Contact Plated:
S0=Sel.Gold Flash/Sn


Color:

W=Grey White
G=Dark Grey
T=Light Grey

Part.Nober	Pins	Dim.A	Dim.B
BH762-04-08-X-S0-S01	8P	70.95	53.34
BH762-04-12-X-S0-S01	12P	101.43	83.82
BH762-04-16-X-S0-S01	16P	131.91	114.30
BH762-04-20-X-S0-S01	20P	162.39	144.78

A4	2021/03/25	ADD UL LOGO	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2019/07/25	ADD LIGHT GREY COLOR	XSR	X.X ±0.40	XSR	2021/03/25	UNIT	mm	BH762-04-XX-X-S0-S01
A2	2018/03/14	MODIFY	XSR	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2016/11/14	NEW	---	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	7.62Pitch*8.20mm,Double-Row, W19.00mm*H35.70mm Barrier Terminal Blocks
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL			PROJ.		Customer NO.

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

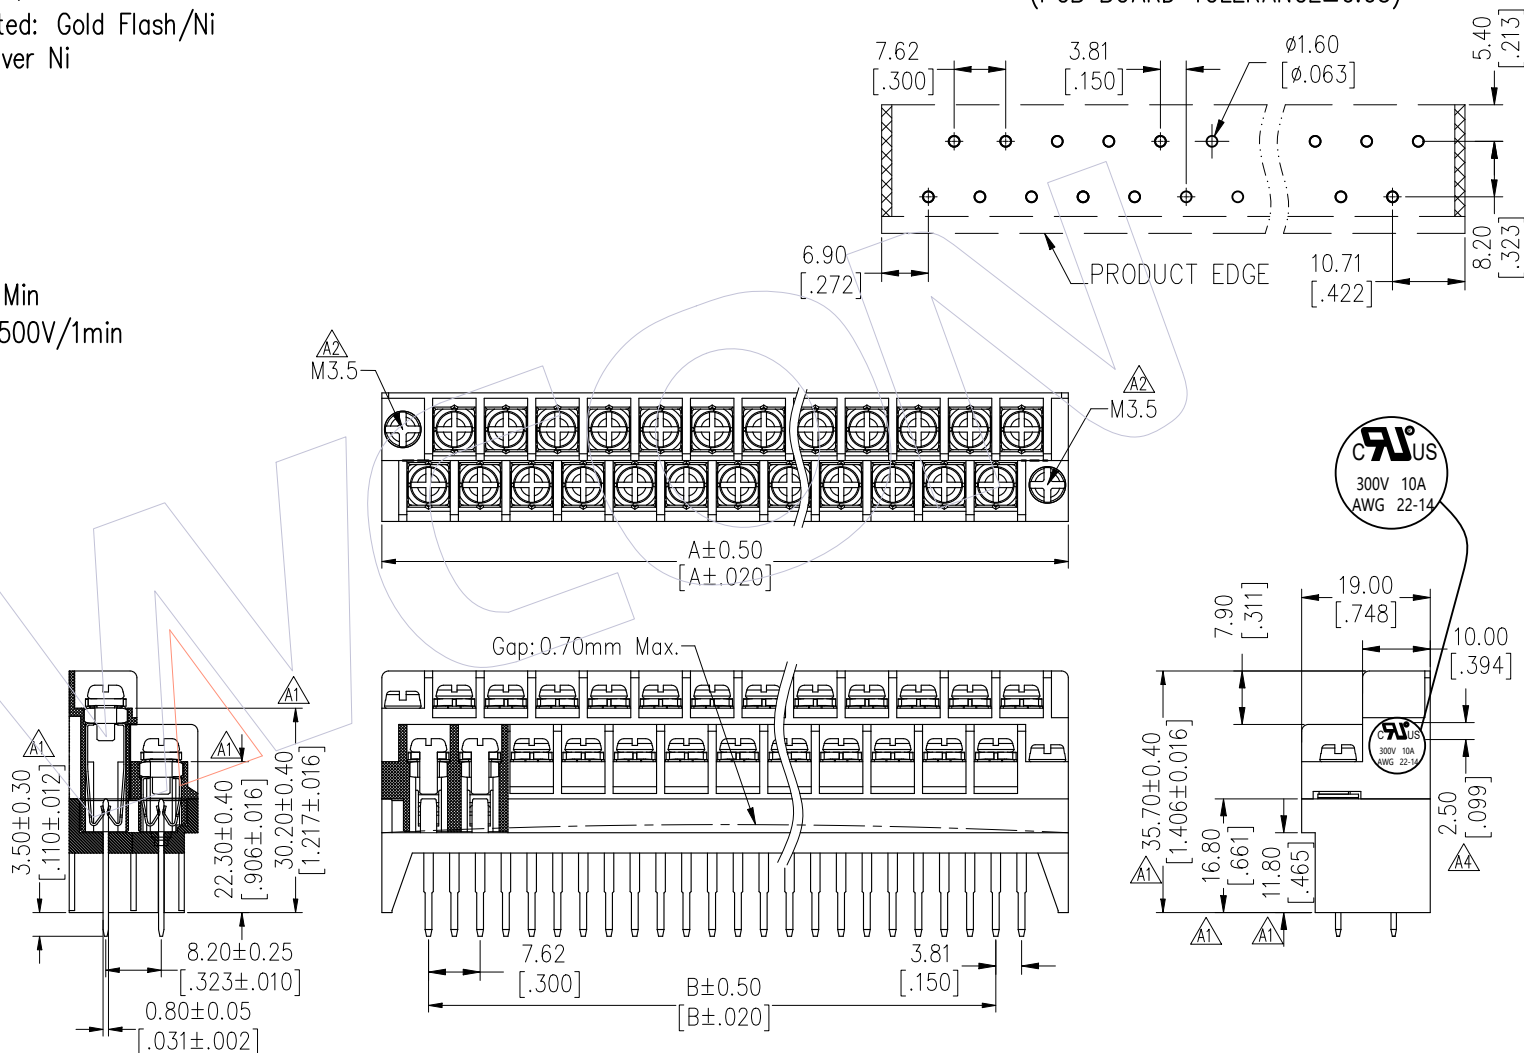

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com