

HSF

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: PA66+30%GF(UL94V-0)
 - 1.2 COVER: PA66+30%GF(UL94V-0)
 - 1.3 TERMINAL: BRASS, MATTE TIN PLATED OVER NICKEL
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 8 A
 - 2.2 VOLTAGE RATING: 300 V
 - 2.3 CONTACT RESISTANCE: 8 mΩ MAX.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 2000V AC
 - 2.5 INSULATION RESISTANCE: 1000 MΩ MIN
3. ENVIRONMENTAL:
 - 3.1 OPERATION TEMPERATURE: -40°C TO +105°C
4. No. OF POSITIONS: 2~20
5. ALL MATERIALS SHOULD BE COMPLIANT TO ROHS

Ordering Information:

P M 350 - 3S XX A SM 2 N

M=Male



No. of Pins
(Per Row)
02-20P

Contact Plated
SM=Matte Tin
Color
A=Green


N=W/O WCON
Series No.

Pitch
350=3.50

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	3.50	12.30	17.70	12	38.50	47.30	52.70
03	7.00	15.80	21.20	13	42.00	50.80	56.20
04	10.50	19.30	24.70	14	45.50	54.30	59.70
05	14.00	22.80	28.20	15	49.00	57.80	63.20
06	17.50	26.30	31.70	16	52.50	61.30	66.70
07	21.00	29.80	35.20	17	56.00	64.80	70.20
08	24.50	33.30	38.70	18	59.50	68.30	73.70
09	28.00	36.80	42.20	19	63.00	71.80	77.20
10	31.50	40.30	45.70	20	66.50	75.30	80.70
11	35.00	43.80	49.20				

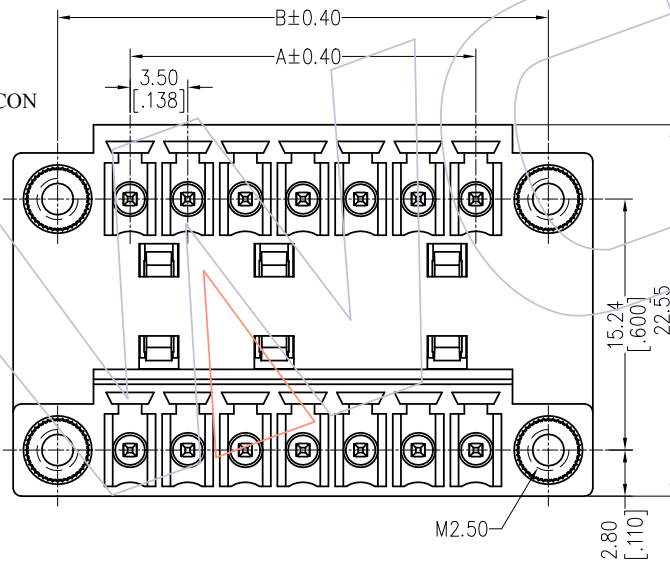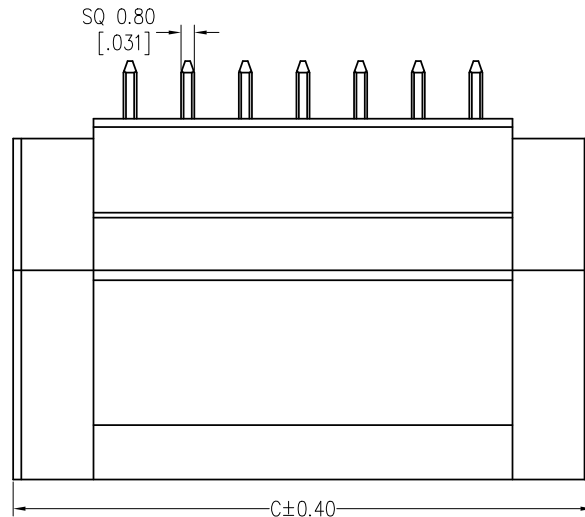

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

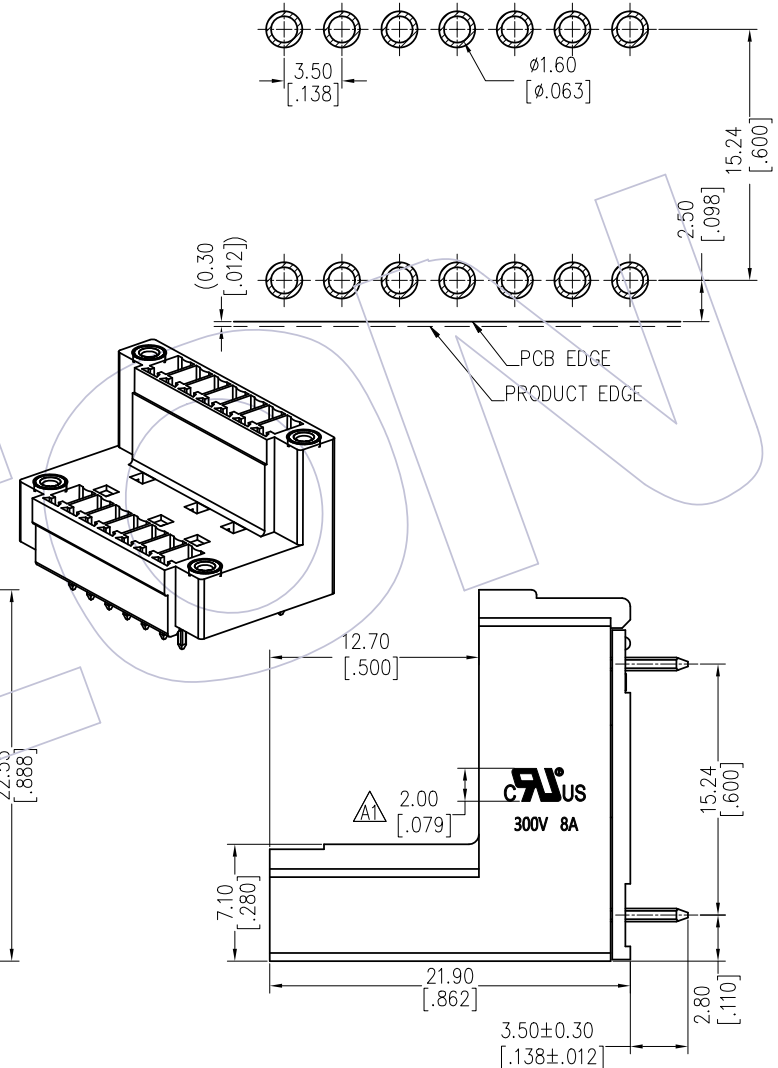

				OPERATION		DRAW XSR	DATE 2020/11/19	SCALE	FIT	PART NO. PM350-3SXXASM2N TITLE: 3.50mm Pitch Male Pluggable Terminal Blocks Double Stagger Tier W/T Flange Customer NO.
				X.X	±0.40			UNIT	mm inch	
A1	2020/11/19	ADD UL LOGO	XSR	X.XX	±0.25	CHECK	DATE	SIZE	A4	
A0	2013/09/17	NEW	—	X.XXX	±0.15			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	± 3° TOL	APPROVE	DATE	PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com