

NOTES:

- Insulator material: PA9T+33%G.F, UL94 V-0;
- Terminal material: Copper Alloy;
Terminal Plating: Au/Sn Plated Over Nickel ;
- Rated Voltage: Power 600V;
- Rated Current: Power 30A;
- Contact Resistance:
Power 0.7mΩ Max;
- Insulation Resistance: DC500V
Power 10000MΩ Min;
- Insulation Withstand Voltage:
Power 2500VAC/1min;
- Durability :200 cycling;
- Operation Temperature: -20°C to +105°C;

P4FR A - XX XX X X A 1

No. Power:
01=1Pin
20=20Pin

Tail Options(DIP Type):
A=3.43mm
B=2.29mm
C=4.19mm









Power Contact Plated:
W3=10u" Gold/Matte Tin
W4=15u" Gold/Matte Tin
W5=30u" Gold/Matte Tin

Fixed Mode:
M: W/T Lock
N: W/O Lock

Packing:
A=Tray

Product Data Sheet

No.	P/N	No. Power	DIM "A"	DIM "B"	DIM "C"	DIM "F"
1	P4FRA-10XXXXA1	10	80.01	72.39	71.12	75.77
2	P4FRA-08XXXXA1	8	67.31	59.69	58.42	63.07
3	P4FRA-06XXXXA1	6	54.61	46.99	45.72	50.37
4	P4FRA-05XXXXA1	5	48.26	40.64	39.37	44.02
5	P4FRA-04XXXXA1	4	41.91	34.29	33.02	37.67
6	P4FRA-03XXXXA1	3	35.56	27.94	26.67	31.32
7	P4FRA-02XXXXA1	2	29.21	21.59	20.32	24.97

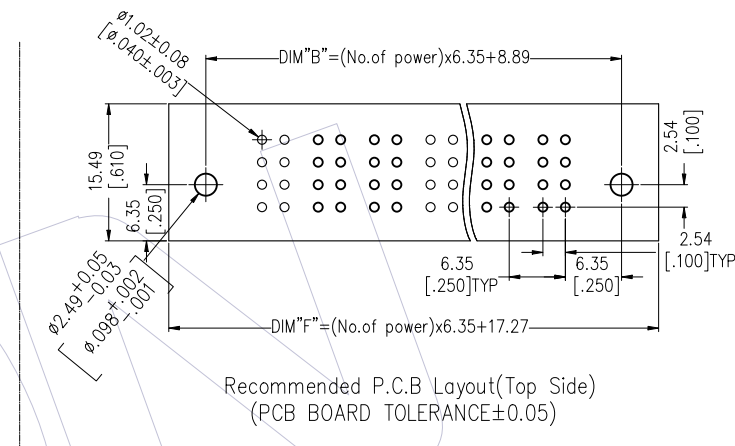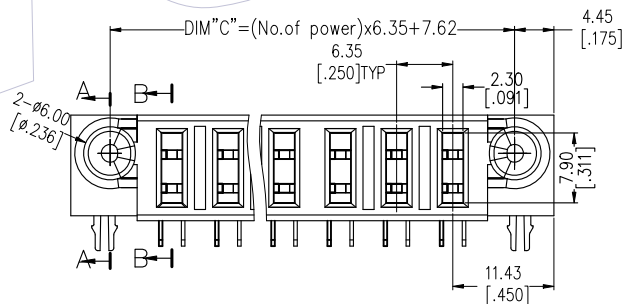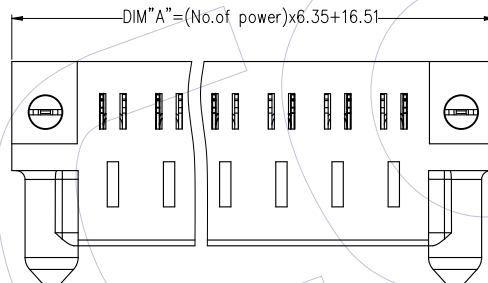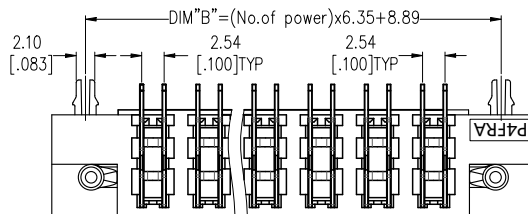

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2024/09/04	Cancel Xu"Gold/Tin Plated	XSR	X.X ±0.40	XSR	2024/09/04	UNIT	mm	P4FRA-XXXXXXA1	PSP Spacing A 90° DIP FEMALE	
A1	2022/03/28	Modify Notes		X.XX ±0.25	CHECK	DATE	SIZE	A4		(TYPE-4:Power)	
A0	2018/10/10	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET	1/1			
				Angle ± 3°			PROJ.				
				DIM TOL							

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com