

HSF

NOTES:

Rated Current:3.0A

Contact Resistance: 20m Ω max

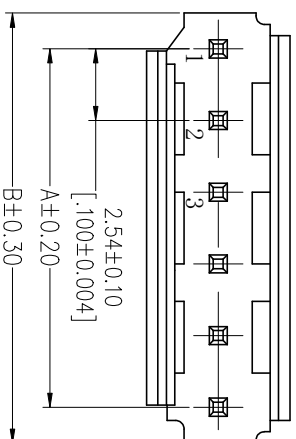
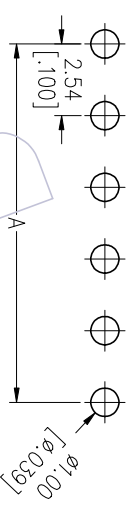
Withstand Voltage:1000V AC/Minute

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass

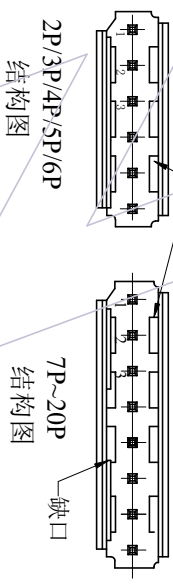
Contact plating: Au Or Sn Over Ni

Insulator Material: PA66 (UL94V-0)

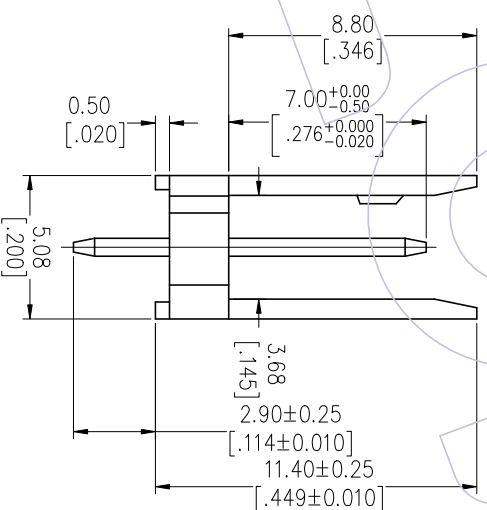
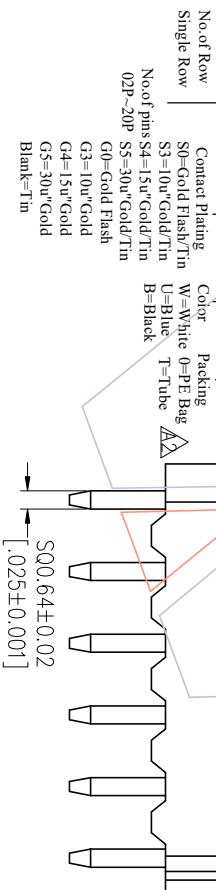
(PCB BOARD TOLERANCE $\pm$ 0.05)

~~Scale: 1:2~~

掬料槽依PIN数不同而变化,无功能影响



Ordering Information

WF2547-1 WS XX XX X X 1

Circuit	Part No.	Dimension	
		A	B
02	WF2547-1WS02XX1	2.54	5.08
03	WF2547-1WS03XX1	5.08	7.62
04	WF2547-1WS04XX1	7.62	10.16
05	WF2547-1WS05XX1	10.16	12.70
06	WF2547-1WS06XX1	12.70	15.24
07	WF2547-1WS07XX1	15.24	17.78
08	WF2547-1WS08XX1	17.78	20.32
09	WF2547-1WS09XX1	20.32	22.86
10	WF2547-1WS10XX1	22.86	25.40
11	WF2547-1WS11XX1	25.40	27.94
12	WF2547-1WS12XX1	27.94	30.48
13	WF2547-1WS13XX1	30.48	33.02
14	WF2547-1WS14XX1	33.02	35.56
15	WF2547-1WS15XX1	35.56	38.10
16	WF2547-1WS16XX1	38.10	40.64
17	WF2547-1WS17XX1	40.64	43.18
18	WF2547-1WS18XX1	43.18	45.72
19	WF2547-1WS19XX1	45.72	48.26
20	WF2547-1WS20XX1	48.26	50.80

[illegible]