



HSF

NOTES:


- 1.Material Specification:PBT,UL94V-0,BK;
2.Withstand Voltage: 3000V AC;
3.Insulation Resistance: 1000MΩ Min;
4.Operating Temperature:
-40°C to +125°C;
5.Applicaation Terminal:
WD10160-MTD4XXXXXX;
6.RoHS Compliant

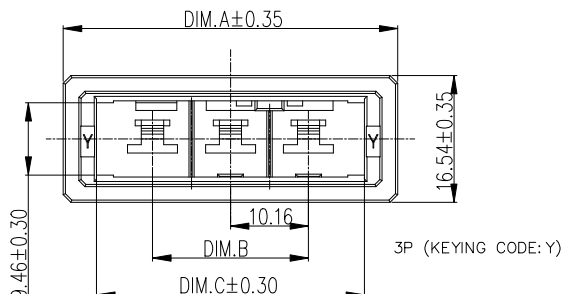

KEYING SHOWN
SCALE 1:2



6P (KEYING CODE: Y)



6P (KEYING CODE: X)




4P (KEYING CODE: Y)




4P (KEYING CODE: X)


AS SHOWN





3P (KEYING CODE: X)



2P (KEYING CODE: Y)



2P (KEYING CODE: X)

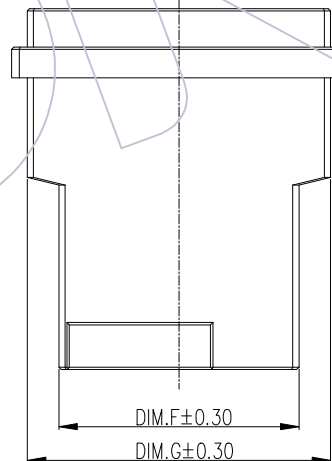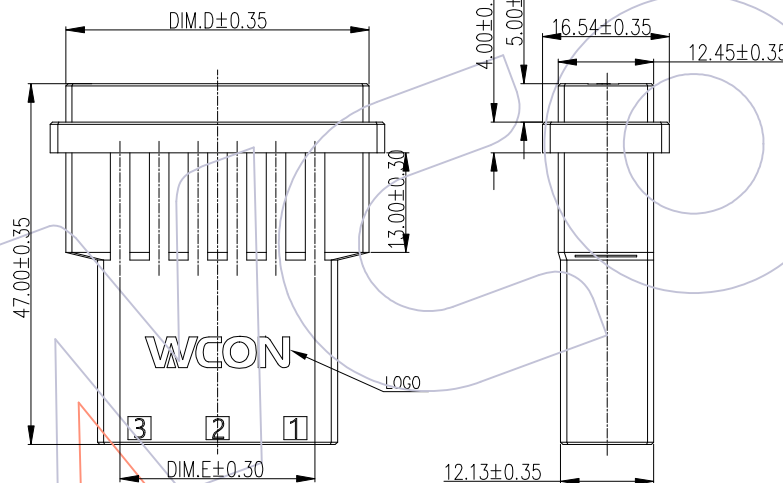

.3D VIEW

Ordering Information

WD10160-1 HK XX B 0 XX W

1=Single Row —

HK=Alleyoop.

Housing

No. of Pins: _____
02=2P; 03=3P; 04=4P; 06=6P

Color:

B=Black

PACKING: PE Bag

CODE OF KEYING

01=X; 02=Y

Blank=Without "WCON" Logos

W=With "WCON" Log

	2PIN	3PIN	4PIN	6PIN
DIM.A	33.44	43.60	53.76	74.08
DIM.B	10.16	20.32	30.48	50.80
DIM.C	24.76	34.92	45.08	65.40
DIM.D	29.36	39.52	49.68	70.00
DIM.E	15.24	25.40	35.56	55.88
DIM.F	21.11	31.27	41.43	61.75
DIM.G	29.36	39.52	49.68	70.00

			OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com	
			X.X	±0.40	ZJQ	2022.09.10	UNIT	mm	WD10160—1HKXXBOX(W)		
			X.XX	±0.25	CHECK	DATE			TITLE:	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
			X.XXX	±0.15	XYQ	2022.09.10	SIZE	A4	10.16mm Dynamic Receptacle, Alleyoop Housing, Single Row		
A0	2022.09.10	NEW	ZJQ	Angle ± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	ZSZ	2022.09.10	PROJ.				