

HSF

NOTES:



- Rated Current: 1.5AMP.(20°C,2*2P-2*15P)
1.0AMP.(20°C,2*16P-2*50P) $\triangle A5$
- Contact Resistance: 20mΩ Max.
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min.
- Operation Temperature: -40°C to +125°C(Gold Plating) $\triangle A5$
-40°C to +105°C(Tin Plating) $\triangle A5$
- Contact Material: Copper Alloy
- Contact Plating: Au or Sn Over 30u" Min Ni $\triangle A5$
- Insulator Material: PA9T+G.F UL94V-0 BK $\triangle A5$

Ordering Information

1325B-1 2 XX XX Z XXX C R XX $\triangle A5$




- Plastic Layer
- Plastic Row
- No. of Pins
- Per Row: 02-50
- Contact Plating
- G0=Gold Flash
- G3=10u"Au, BG3=8u"PdNi+2u"Au
- G4=15u"Au, BG4=13u"PdNi+2u"Au
- G5=30u"Au, BG5=28u"PdNi+2u"Au
- S0=Gold Flash/Tin
- S3=10u"Au/Sn, P3=8u"PdNi+2u"Au/Sn
- S4=15u"Au/Sn, P4=13u"PdNi+2u"Au/Sn
- S5=30u"Au/Sn, P5=28u"PdNi+2u"Au/Sn
- SN=Bright Tin
- SM=Matte Tin
- Series No. 01-99
- Packing T=Tube P=Tube+CAP R=Tape&Reel+CAP
- Insulator Material C=PA9T(Standard)
- Pin Length L(See Table)
- Type: Z=R/A SMT

| Item | Pin Length Short/Long | A1 | A | B | Mating |
|-----------|-----------------------|-----|-----|-----|----------------|
| Standard | 7.0/10.5 | 2.4 | 5.2 | 2.0 | 23212320T |
| | 8.0/11.5 | | | 3.0 | 2334/2344/2346 |
| | 8.5/12.0 | | | 3.5 | 2357 |
| | 9.5/13.0 | | | 4.5 | 2345/2385 |
| Alternate | | | | | |

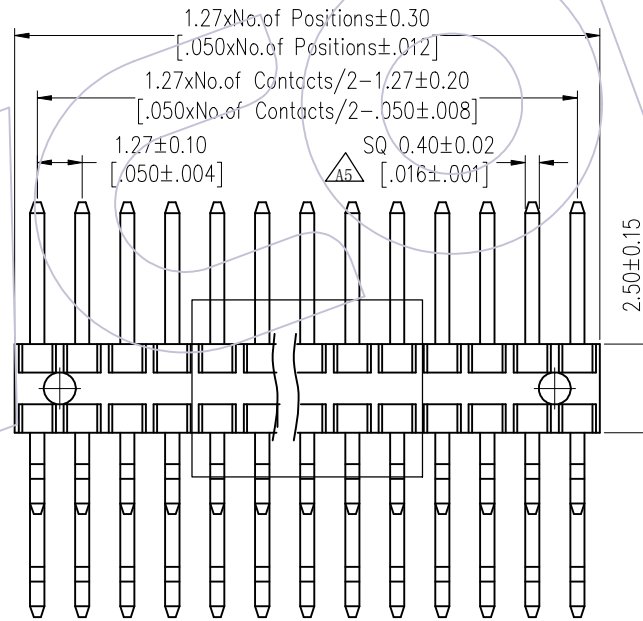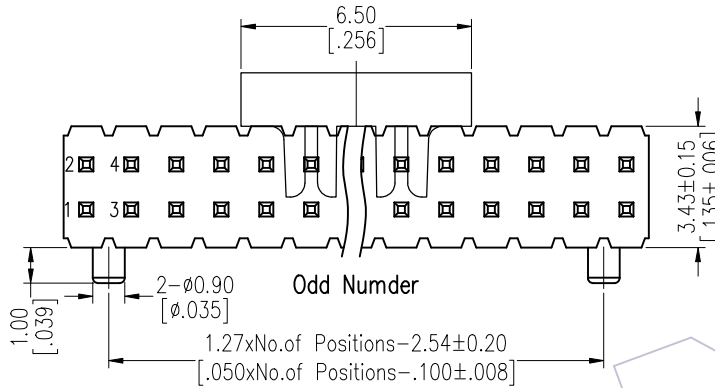

Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE±0.05)
(PCB Thickness:T=1.60mm)

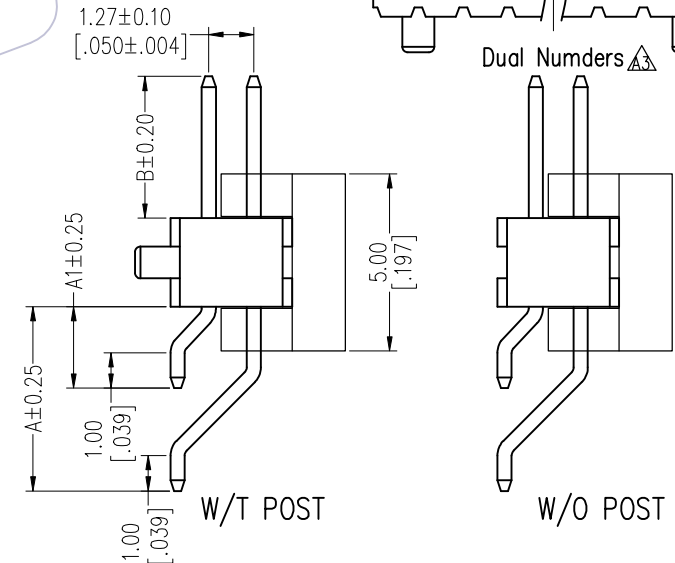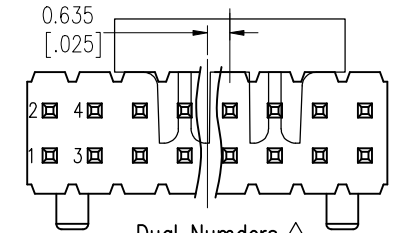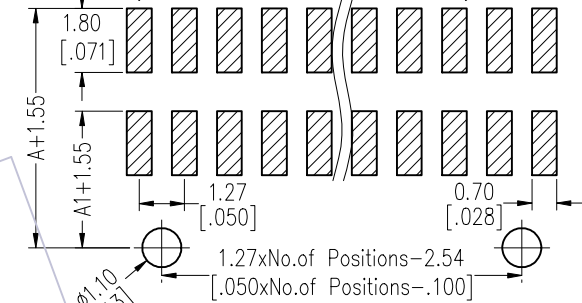

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | APPROVE | DATE | PROJ. | PART NO. | TITLE: | Customer NO. |
|-----|------------|--------------------------|--------------|-------|-------|-------------|------------|-------|-------------------------------------|---|--------------|
| A5 | 2025/08/18 | Standardization Drawing | CP | | | OPERATION | DATE | SCALE | 1325B-12XXXXZXXXCXXX $\triangle A5$ | 1.27 Pin Header, DUAL ROW, R/A&SMT, H=2.5 | Customer NO. |
| A4 | 2018/01/18 | MODIFY PART NO. | William Chen | x.x | ±0.40 | DRAW | 2025/08/18 | UNIT | | | |
| A3 | 2013/06/07 | Modify Drawing | William Chen | x.xx | ±0.25 | CHECK | DATE | SIZE | A4 | | |
| A0 | 2012/03/31 | NEW | William Chen | x.xxx | ±0.15 | TANG | 2025/08/18 | SHEET | 1/5 | | |
| | | | | Angle | ± 3° | APPROVE | DATE | PROJ. | | | |
| | | | | | | Steven Zhao | 2025/08/18 | | | | |

WCON


Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

HSF

Packing:

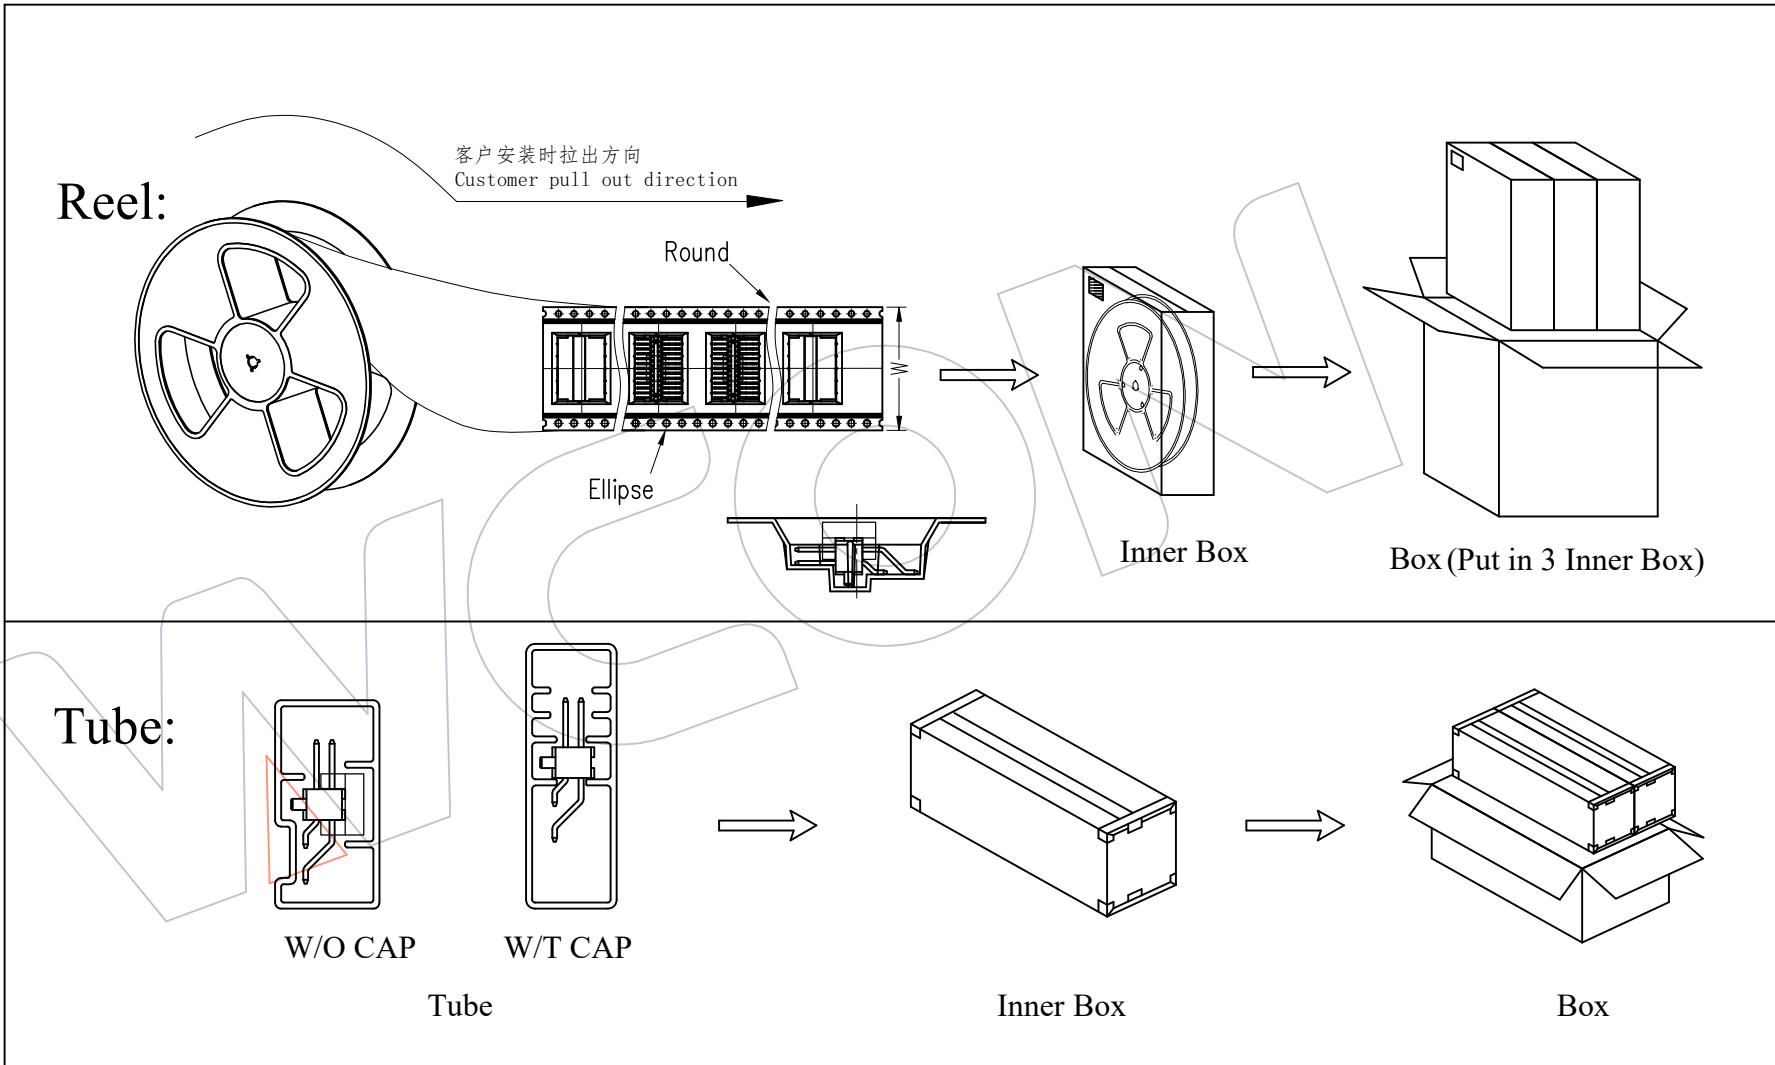

| | | | | | | | | | |
|-----|------------|--------------------------|--------------|-------------|------------------------|------------|-------|-----------|--|
| A5 | 2025/08/18 | Standardization Drawing | CP | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. 1325B-12XXXXZXXXCXXX |
| A4 | 2018/01/18 | MODIFY PART NO. | William Chen | x.X ±0.40 | CP | 2025/08/18 | UNIT | mm [inch] | |
| A3 | 2013/06/07 | Modify Drawing | William Chen | x.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: 1.27 Pin Header, DUAL ROW, R/A&SMT, H=2.5 |
| A0 | 2012/03/31 | NEW | William Chen | x.XXX ±0.15 | TANG | 2025/08/18 | SHEET | 2/5 | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle ± 3° | APPROVE Steven Zhao | DATE | PROJ. | | Customer NO. |
| | | | | DIM TOL | | 2025/08/18 | | | |

WCON
[Http: www.wcon.com](http://www.wcon.com)

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com

HSF

Packaging Quantity Refers To The Following Table

W/T CAP

| PINS /Row | Q' ty/Tube | Q' ty/Inner Box | Q' ty/Box |
|-----------|------------|-----------------|-----------|
| 4 | 89 | 8,900 | 17,800 |
| 5 | 89 | 8,900 | 17,800 |
| 6 | 76 | 7,600 | 15,200 |
| 7 | 64 | 6,400 | 12,800 |
| 8 | 55 | 5,500 | 11,000 |
| 9 | 49 | 4,900 | 9,800 |
| 10 | 45 | 4,500 | 9,000 |
| 11 | 40 | 4,000 | 8,000 |
| 12 | 38 | 3,800 | 7,600 |
| 13 | 34 | 3,400 | 6,800 |
| 14 | 32 | 3,200 | 6,400 |
| 15 | 29 | 2,900 | 5,800 |
| 16 | 28 | 2,800 | 5,600 |
| 17 | 26 | 2,600 | 5,200 |
| 18 | 25 | 2,500 | 5,000 |
| 19 | 23 | 2,300 | 4,600 |
| 20 | 22 | 2,200 | 4,400 |
| 21 | 21 | 2,100 | 4,200 |
| 22 | 20 | 2,000 | 4,000 |
| 23 | 19 | 1,900 | 3,800 |
| 24 | 18 | 1,800 | 3,600 |
| 25 | 18 | 1,800 | 3,600 |
| 26 | 17 | 1,700 | 3,400 |
| 27 | 16 | 1,600 | 3,200 |

W/T CAP

| PINS /Row | Q' ty/Tube | Q' ty/Inner Box | Q' ty/Box |
|-----------|------------|-----------------|-----------|
| 28 | 16 | 1,600 | 3,200 |
| 29 | 15 | 1,500 | 3,000 |
| 30 | 15 | 1,500 | 3,000 |
| 31 | 14 | 1,400 | 2,800 |
| 32 | 14 | 1,400 | 2,800 |
| 33 | 13 | 1,300 | 2,600 |
| 34 | 13 | 1,300 | 2,600 |
| 35 | 13 | 1,300 | 2,600 |
| 36 | 12 | 1,200 | 2,400 |
| 37 | 12 | 1,200 | 2,400 |
| 38 | 11 | 1,100 | 2,200 |
| 39 | 11 | 1,100 | 2,200 |
| 40 | 11 | 1,100 | 2,200 |
| 41 | 11 | 1,100 | 2,200 |
| 42 | 10 | 1,000 | 2,000 |
| 43 | 10 | 1,000 | 2,000 |
| 44 | 10 | 1,000 | 2,000 |
| 45 | 10 | 1,000 | 2,000 |
| 46 | 9 | 900 | 1,800 |
| 47 | 9 | 900 | 1,800 |
| 48 | 9 | 900 | 1,800 |
| 49 | 9 | 900 | 1,800 |
| 50 | 9 | 900 | 1,800 |

W/O CAP

| PINS /Row | Q' ty/Tube | Q' ty/Inner Box | Q' ty/Box |
|-----------|------------|-----------------|-----------|
| 4 | 107 | 14,124 | 28,248 |
| 5 | 89 | 11,748 | 23,496 |
| 6 | 76 | 10,032 | 20,064 |
| 7 | 64 | 8,448 | 16,896 |
| 8 | 55 | 7,260 | 14,520 |
| 9 | 49 | 6,468 | 12,936 |
| 10 | 45 | 5,940 | 11,880 |
| 11 | 40 | 5,280 | 10,560 |
| 12 | 38 | 5,016 | 10,032 |
| 13 | 34 | 4,488 | 8,976 |
| 14 | 32 | 4,224 | 8,448 |
| 15 | 29 | 3,828 | 7,656 |
| 16 | 28 | 3,696 | 7,392 |
| 17 | 26 | 3,432 | 6,864 |
| 18 | 25 | 3,300 | 6,600 |
| 19 | 23 | 3,036 | 6,072 |
| 20 | 22 | 2,904 | 5,808 |
| 21 | 21 | 2,772 | 5,544 |
| 22 | 20 | 2,640 | 5,280 |
| 23 | 19 | 2,508 | 5,016 |
| 24 | 18 | 2,376 | 4,752 |
| 25 | 18 | 2,376 | 4,752 |
| 26 | 17 | 2,244 | 4,488 |
| 27 | 16 | 2,112 | 4,224 |

W/O CAP

| PINS /Row | Q' ty/Tube | Q' ty/Inner Box | Q' ty/Box |
|-----------|------------|-----------------|-----------|
| 28 | 16 | 2,112 | 4,224 |
| 29 | 15 | 1,980 | 3,960 |
| 30 | 15 | 1,980 | 3,960 |
| 31 | 14 | 1,848 | 3,696 |
| 32 | 14 | 1,848 | 3,696 |
| 33 | 13 | 1,716 | 3,432 |
| 34 | 13 | 1,716 | 3,432 |
| 35 | 13 | 1,716 | 3,432 |
| 36 | 12 | 1,584 | 3,168 |
| 37 | 12 | 1,584 | 3,168 |
| 38 | 11 | 1,452 | 2,904 |
| 39 | 11 | 1,452 | 2,904 |
| 40 | 11 | 1,452 | 2,904 |
| 41 | 11 | 1,452 | 2,904 |
| 42 | 10 | 1,320 | 2,640 |
| 43 | 10 | 1,320 | 2,640 |
| 44 | 10 | 1,320 | 2,640 |
| 45 | 10 | 1,320 | 2,640 |
| 46 | 9 | 1,188 | 2,376 |
| 47 | 9 | 1,188 | 2,376 |
| 48 | 9 | 1,188 | 2,376 |
| 49 | 9 | 1,188 | 2,376 |
| 50 | 9 | 1,188 | 2,376 |

| | | | | | | | | | |
|-----|------------|--------------------------|--------------|-------------|-------------|------------|-------|-----------|---|
| A5 | 2025/08/18 | Standardization Drawing | CP | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
| A4 | 2018/01/18 | MODIFY PART NO. | William Chen | x.X ±0.40 | CP | 2025/08/18 | UNIT | mm [inch] | 1325B-12XXXXZXXCXXX |
| A3 | 2013/06/07 | Modify Drawing | William Chen | x.xx ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: |
| A0 | 2012/03/31 | NEW | William Chen | x.xxx ±0.15 | TANG | 2025/08/18 | SHEET | 3/5 | 1.27 Pin Header, DUAL ROW, R/A&SMT, H=2.5 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle ± 3° | APPROVE | DATE | PROJ. | | Customer NO. |
| | | | | DIM TOL | Steven Zhao | 2025/08/18 | | | |



Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|---|--|

HSF

Packaging Quantity Refers To The Following Table

B=2.0

B=2.0

B=3.0

B=3.0

| PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box |
|-----------|----|------------|-----------------|-----------|
| 2 | 12 | 600 | 3,600 | 10,800 |
| 3 | 16 | 600 | 2,400 | 7,200 |
| 4 | 16 | 600 | 2,400 | 7,200 |
| 5 | 16 | 600 | 2,400 | 7,200 |
| 6 | 24 | 600 | 1,800 | 5,400 |
| 7 | 24 | 600 | 1,800 | 5,400 |
| 8 | 24 | 600 | 1,800 | 5,400 |
| 9 | 24 | 600 | 1,800 | 5,400 |
| 10 | 24 | 600 | 1,800 | 5,400 |
| 11 | 24 | 600 | 1,800 | 5,400 |
| 12 | 32 | 600 | 1,200 | 3,600 |
| 13 | 32 | 600 | 1,200 | 3,600 |
| 14 | 32 | 600 | 1,200 | 3,600 |
| 15 | 44 | 600 | 1,200 | 3,600 |
| 16 | 44 | 600 | 1,200 | 3,600 |
| 17 | 44 | 600 | 1,200 | 3,600 |
| 18 | 44 | 600 | 1,200 | 3,600 |
| 19 | 44 | 600 | 1,200 | 3,600 |
| 20 | 44 | 600 | 1,200 | 3,600 |
| 21 | 44 | 600 | 1,200 | 3,600 |
| 22 | 44 | 600 | 1,200 | 3,600 |
| 23 | 44 | 600 | 1,200 | 3,600 |
| 24 | 44 | 600 | 1,200 | 3,600 |
| 25 | 56 | 600 | 600 | 1,800 |
| 26 | 56 | 600 | 600 | 1,800 |

| PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box |
|-----------|----|------------|-----------------|-----------|
| 27 | 56 | 600 | 600 | 1,800 |
| 28 | 56 | 600 | 600 | 1,800 |
| 29 | 56 | 600 | 600 | 1,800 |
| 30 | 56 | 600 | 600 | 1,800 |
| 31 | 56 | 600 | 600 | 1,800 |
| 32 | 56 | 600 | 600 | 1,800 |
| 33 | 56 | 600 | 600 | 1,800 |
| 34 | 72 | 600 | 600 | 1,800 |
| 35 | 72 | 600 | 600 | 1,800 |
| 36 | 72 | 600 | 600 | 1,800 |
| 37 | 72 | 600 | 600 | 1,800 |
| 38 | 72 | 600 | 600 | 1,800 |
| 39 | 72 | 600 | 600 | 1,800 |
| 40 | 72 | 600 | 600 | 1,800 |
| 41 | 72 | 600 | 600 | 1,800 |
| 42 | 72 | 600 | 600 | 1,800 |
| 43 | 72 | 600 | 600 | 1,800 |
| 44 | 72 | 600 | 600 | 1,800 |
| 45 | 72 | 600 | 600 | 1,800 |
| 46 | 72 | 600 | 600 | 1,800 |
| 47 | 88 | 600 | 600 | 1,800 |
| 48 | 88 | 600 | 600 | 1,800 |
| 49 | 88 | 600 | 600 | 1,800 |
| 50 | 88 | 600 | 600 | 1,800 |

| PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box |
|-----------|----|------------|-----------------|-----------|
| 2 | 12 | 450 | 2,700 | 8,100 |
| 3 | 16 | 450 | 1,800 | 5,400 |
| 4 | 16 | 450 | 1,800 | 5,400 |
| 5 | 16 | 450 | 1,800 | 5,400 |
| 6 | 24 | 450 | 1,350 | 4,050 |
| 7 | 24 | 450 | 1,350 | 4,050 |
| 8 | 24 | 450 | 1,350 | 4,050 |
| 9 | 24 | 450 | 1,350 | 4,050 |
| 10 | 24 | 450 | 1,350 | 4,050 |
| 11 | 24 | 450 | 1,350 | 4,050 |
| 12 | 32 | 450 | 900 | 2,700 |
| 13 | 32 | 450 | 900 | 2,700 |
| 14 | 32 | 450 | 900 | 2,700 |
| 15 | 44 | 450 | 900 | 2,700 |
| 16 | 44 | 450 | 900 | 2,700 |
| 17 | 44 | 450 | 900 | 2,700 |
| 18 | 44 | 450 | 900 | 2,700 |
| 19 | 44 | 450 | 900 | 2,700 |
| 20 | 44 | 450 | 900 | 2,700 |
| 21 | 44 | 450 | 900 | 2,700 |
| 22 | 44 | 450 | 900 | 2,700 |
| 23 | 44 | 450 | 900 | 2,700 |
| 24 | 44 | 450 | 900 | 2,700 |
| 25 | 56 | 450 | 450 | 1,350 |
| 26 | 56 | 450 | 450 | 1,350 |

| PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box |
|-----------|----|------------|-----------------|-----------|
| 27 | 56 | 450 | 450 | 1,350 |
| 28 | 56 | 450 | 450 | 1,350 |
| 29 | 56 | 450 | 450 | 1,350 |
| 30 | 56 | 450 | 450 | 1,350 |
| 31 | 56 | 450 | 450 | 1,350 |
| 32 | 56 | 450 | 450 | 1,350 |
| 33 | 56 | 450 | 450 | 1,350 |
| 34 | 72 | 450 | 450 | 1,350 |
| 35 | 72 | 450 | 450 | 1,350 |
| 36 | 72 | 450 | 450 | 1,350 |
| 37 | 72 | 450 | 450 | 1,350 |
| 38 | 72 | 450 | 450 | 1,350 |
| 39 | 72 | 450 | 450 | 1,350 |
| 40 | 72 | 450 | 450 | 1,350 |
| 41 | 72 | 450 | 450 | 1,350 |
| 42 | 72 | 450 | 450 | 1,350 |
| 43 | 72 | 450 | 450 | 1,350 |
| 44 | 72 | 450 | 450 | 1,350 |
| 45 | 72 | 450 | 450 | 1,350 |
| 46 | 72 | 450 | 450 | 1,350 |
| 47 | 88 | 450 | 450 | 1,350 |
| 48 | 88 | 450 | 450 | 1,350 |
| 49 | 88 | 450 | 450 | 1,350 |
| 50 | 88 | 450 | 450 | 1,350 |

| | | | | | | | | | |
|-----|------------|--------------------------|--------------|-------------|-------------|------------|-------|-----------|---|
| A5 | 2025/08/18 | Standardization Drawing | CP | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
| A4 | 2018/01/18 | MODIFY PART NO. | William Chen | x.X ±0.40 | CP | 2025/08/18 | UNIT | mm [inch] | 1325B-12XXXXZXXXCXXX |
| A3 | 2013/06/07 | Modify Drawing | William Chen | x.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: |
| A0 | 2012/03/31 | NEW | William Chen | x.XXX ±0.15 | TANG | 2025/08/18 | SHEET | 4/5 | 1.27 Pin Header, DUAL ROW, R/A&SMT, H=2.5 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle ± 3° | APPROVE | DATE | PROJ. | | Customer NO. |
| | | | | DIM TOL | Steven Zhao | 2025/08/18 | | | |

WCON

Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|---|--|




HSF

Packaging Quantity Refers To The Following Table

B=3.5/4.5

B=3.5/4.5

| PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box | PINS /Row | W | Q' ty/Reel | Q' ty/Inner Box | Q' ty/Box |
|-----------|----|------------|-----------------|-----------|-----------|----|------------|-----------------|-----------|
| 2 | 12 | 500 | 3,000 | 9,000 | 27 | 56 | 500 | 500 | 1,500 |
| 3 | 16 | 500 | 2,000 | 6,000 | 28 | 56 | 500 | 500 | 1,500 |
| 4 | 16 | 500 | 2,000 | 6,000 | 29 | 56 | 500 | 500 | 1,500 |
| 5 | 16 | 500 | 2,000 | 6,000 | 30 | 56 | 500 | 500 | 1,500 |
| 6 | 24 | 500 | 1,500 | 4,500 | 31 | 56 | 500 | 500 | 1,500 |
| 7 | 24 | 500 | 1,500 | 4,500 | 32 | 56 | 500 | 500 | 1,500 |
| 8 | 24 | 500 | 1,500 | 4,500 | 33 | 56 | 500 | 500 | 1,500 |
| 9 | 24 | 500 | 1,500 | 4,500 | 34 | 72 | 500 | 500 | 1,500 |
| 10 | 24 | 500 | 1,500 | 4,500 | 35 | 72 | 500 | 500 | 1,500 |
| 11 | 24 | 500 | 1,500 | 4,500 | 36 | 72 | 500 | 500 | 1,500 |
| 12 | 32 | 500 | 1,000 | 3,000 | 37 | 72 | 500 | 500 | 1,500 |
| 13 | 32 | 500 | 1,000 | 3,000 | 38 | 72 | 500 | 500 | 1,500 |
| 14 | 32 | 500 | 1,000 | 3,000 | 39 | 72 | 500 | 500 | 1,500 |
| 15 | 44 | 500 | 1,000 | 3,000 | 40 | 72 | 500 | 500 | 1,500 |
| 16 | 44 | 500 | 1,000 | 3,000 | 41 | 72 | 500 | 500 | 1,500 |
| 17 | 44 | 500 | 1,000 | 3,000 | 42 | 72 | 500 | 500 | 1,500 |
| 18 | 44 | 500 | 1,000 | 3,000 | 43 | 72 | 500 | 500 | 1,500 |
| 19 | 44 | 500 | 1,000 | 3,000 | 44 | 72 | 500 | 500 | 1,500 |
| 20 | 44 | 500 | 1,000 | 3,000 | 45 | 72 | 500 | 500 | 1,500 |
| 21 | 44 | 500 | 1,000 | 3,000 | 46 | 72 | 500 | 500 | 1,500 |
| 22 | 44 | 500 | 1,000 | 3,000 | 47 | 88 | 500 | 500 | 1,500 |
| 23 | 44 | 500 | 1,000 | 3,000 | 48 | 88 | 500 | 500 | 1,500 |
| 24 | 44 | 500 | 1,000 | 3,000 | 49 | 88 | 500 | 500 | 1,500 |
| 25 | 56 | 500 | 500 | 1,500 | 50 | 88 | 500 | 500 | 1,500 |
| 26 | 56 | 500 | 500 | 1,500 | | | | | |

| | | | | | | | | | | | |
|-----|------------|--------------------------|--------------|-----------|-------|-------------|------------|-------|---|--|--|
| A5 | 2025/08/18 | Standardization Drawing | CP | OPERATION | | DRAW | DATE | SCALE | Fit | PART NO. |  Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com |
| A4 | 2018/01/18 | MODIFY PART NO. | William Chen | x.X | ±0.40 | CP | 2025/08/18 | UNIT | mm [inch] | 1325B-12XXXXZXXXCXXX  | |
| A3 | 2013/06/07 | Modify Drawing | William Chen | x.xx | ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: | |
| A0 | 2012/03/31 | NEW | William Chen | x.xxx | ±0.15 | TANG | 2025/08/18 | SHEET | 5/5 | 1.27 Pin Header, DUAL ROW, R/A&SMT, H=2.5 | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle | ± 3' | APPROVE | DATE | PROJ. |  | Customer NO. | |
| | | | | DIM | TOL | Steven Zhao | 2025/08/18 | | | | |